




CTC Union's safety certified AC to DC power supplies that are 100% compatible with all of our industrial grade device.

- Protections: Short circuit / Overload / Over voltage
- LED indicator for power on
- Cooling by free air convection
- Installation mounting by Din Rail
- UL508, UL60950-1, CB, CE approved
- Heavy industry grade EN61000-6-2 EMS approved
- 3 years warranty



Specifications

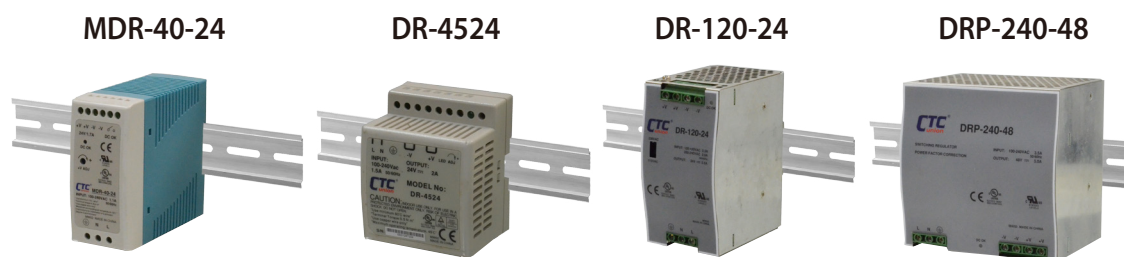

Output	DC Voltage	24V	24V	24V	48V
	Rated Current	1.7A	2A	5A	5A
Rated Power	40.8W	48W	120W	240W	
Input	Voltage Range	85 - 264VAC / 120 ~ 370VDC	85 ~ 264VAC / 120 ~ 370VDC	88 - 132VAC / 176 ~ 264VAC, 248 - 370VDC by switch	85 ~ 264VAC / 120 ~ 370VDC
	Dimension	100 x 40 x 90 mm (D x W x H)	67 x 78 x 93 mm (D x W x H)	100 x 65.5 x 125.2mm (D x W x H)	100 x 125.5 x 125.2 mm (D x W x H)
Environment	Working Temp	-20 ~ 70°C	-10 ~ 50°C	-10 ~ 60°C	-10 ~ 70°C
	Vibration	Compliance to IEC60068-2-6	Compliance to IEC60068-2-6	Compliance to IEC60068-2-6	Compliance to IEC60068-2-6
Safety & EMC	Safety Standards	UL508, UL60950-1 approved	UL508 approved	UL508, UL60950-1 approved	UL508, UL60950-1 approved
	EMC Immunity	EN61000-6-2, heavy industry level, criteria A	EN61000-6-2 heavy industry level, criteria A	EN61000-6-2 heavy industry level, criteria A	EN61000-6-2 heavy industry level, criteria A
Warranty		3 Years	3 Years	3 Years	3 Years