

FMC-1000TS

1000Base-T to 1000Base-X SFP Media Converter

NEW



The FMC-1000TS is a transparent Gigabit Ethernet 1000Base-T to 1000Base-SX/LX SFP converter with very low latency. They are non-managed stand-alone media converters, which give you the options to choose from a wide range of industry standard SFP modules with LC connectors. SFPs in multi-mode and single mode types are available as well as BiDi which allows bi-directional transmissions using only a single fiber cable. Because they are completely transparent to Ethernet packets, they are able to support any size frames, including undersized or jumbo packets (>9K bytes). LED indicators signal the power status of the converter, UTP port speed, Link, and duplex status, FX port Link and duplex status.


Features

- 1000Base-T to 1000Base-SX/LX
- Auto-negotiation or force mode
- Auto MDI/MDIX
- Forward > 9K bytes packets
- Supports Link Fault Pass Through (LFP) function
- Auto Laser Shutdown (ALS)
- Protocol Transparent (OAM, L2CP, etc)
- Latency 0.4μ-sec

Specifications

Optical Interface	Connector	SFP LC
	Data rate	1000Mbps
	Duplex mode	Full duplex
	Fiber	MM 50/125μm, 62.5/125μm SM 9/125μm
	Distance	MM 550m, 2km, SM15/30/50/80/120km WDM 20/40/60km
	Wavelength	MM 1310nm, SM 1310,1550nm WDM 1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B)
Electrical Interface	Connector	RJ-45
	Data rate	1000Mbps
	Duplex mode	Full duplex
	Cable	1000Base-T Cat.6 or above UTP
Standards	IEEE 802.3ab	
Indications	LED (Power, FX-Link, FX Duplex, TX-SPD, TX-Duplex, TX-Link)	
Power Input	12VDC	
Power Consumption	< 12W	
Dimensions	139 × 23.2 × 88mm (D×W×H)	
Weight	0.5kg	
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)	
Humidity	10 ~ 90% non-condensing	
Certification	CE, FCC, LVD	
MTBF	65,000 hrs (25°C)	

Application

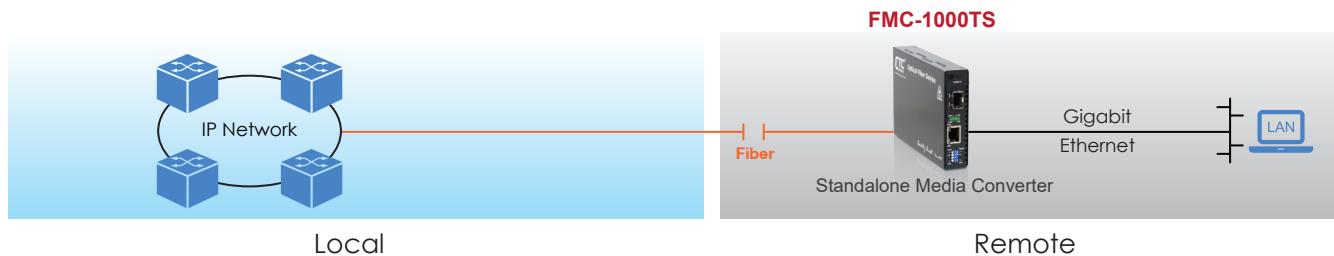

Ordering Information

Model Name	Description
FMC-1000TS	Standalone 1000Base-T to 1000Base-X SFP media converter (Optional SFP)