

## FMC-10GC

10G/5G/2.5G/1G/100M Copper to 10GBASE-R SFP+ Media Converter



The 10G Media Converter, FMC-10GC is equipped with one 10G/5G/2.5G/1G/100BASE-T auto-negotiation port and one 10GBASE-R SFP+ slot. This converter uses Cat.6a/Cat 7 twisted pair cable as copper transmission media with RJ-45 and 10G optical solution with SFP+ LC connector. The data stream can be converted bi-directionally from 10G Base-T to 10G Base-R and vice versa. With full duplex wire speed forwarding capability between these two media, the FMC-10GC brings you the best and simplest solution for the 10G Ethernet conversion between copper wire and fiber.


## Features

- 1× 10G/5G/2.5G/1G/100BASE-T RJ45 interface with auto MDI/MDI-X function
- 1× 10GBASE-X SFP+ slot interface
- Supports auto-negotiation and 100Mbps and 1/2.5/5/10Gbps full duplex mode
- 16K jumbo frame size support
- Wall-mount design
- Loopback Test
- Link Fault Pass Through
- Supports USB console for set up and status checking
- Supports DWDM Tunable SFP+
- Supports Energy, Efficient, Ethernet (EEE)
- Supports Cable Diagnostic
- Supports Pattern Test
- Supports Local F/W upgrade

## Specifications

|                                 |  |
|---------------------------------|--|
| <b>Copper Interface</b>         | 1 × 10G/5G/2.5G/1G/100BASE-T RJ45  |
| <b>Fiber Optic Interface</b>    | 1 × 10GBASE-R SFP+ slot  |
| <b>LED</b>                      | PWR, LFP, FX Link, FX Speed, LAN Link, LAN Speed   |
| <b>Switch Processing Scheme</b> | Store and Forward Switching  |
| <b>Enclosure</b>                | Compact-sized metal case   |
| <b>Installation</b>             | Desktop, wall mountable  |
| <b>Dimensions (W×D×H)</b>       | 95 × 23 × 73.4mm   |
| <b>Weight</b>                   | 280g   |
| <b>Power Requirements</b>       | 12VDC / 1A   |
| <b>Power Consumption</b>        | 6W (max)   |
| <b>Fabric</b>                   | 20Gbps   |
| <b>Jumbo Frame</b>              | 16K  |
| <b>Regulatory Compliance</b>    | FCC Part 15 Class A, CE  |
| <b>Operating Temperature</b>    | 0 ~ 45 °C  |
| <b>Storage Environment</b>      | -10 ~ 70 °C  |
| <b>Operating Humidity</b>       | 5 ~ 95% non-condensing   |
| <b>Storage Humidity</b>         | 5 ~ 95% non-condensing   |
| <b>Standards Compliance</b>     | IEEE 802.3u 100BASE-TX, IEEE 802.3ab 1000BASE-T, IEEE 802.3bz 2.5G/5GBASE-T<br>IEEE 802.3an 10GBASE-T, IEEE 802.3ae 10Gbps Ethernet over Fiber |
| <b>Network Cable</b>            | 10GBase-T : 100meters over CAT6A and CAT7, 55meters over CAT6, Best Effort over CAT5e  |
| <b>MTBF</b>                     | 65,000 hrs   |

## Application

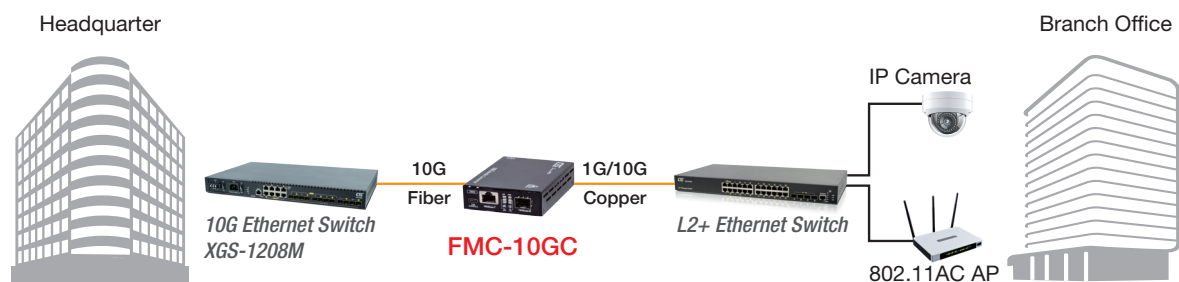

## Ordering Information

| Model Name | Description  |
|------------|--|
| FMC-10GC   | 10G/5G/2.5G/1G/100M RJ45 to 10GBASE-R SFP+ 10G Media Converter |

### NOTE:

Up to 5 FMC-10GC units can be installed in the FMC-CH17 chassis with a 65W power budget.

Up to 17 FMC-10GC units can be installed in the FMC-CH17 chassis with a 200W power budget.