

# FRM220-DATA FRM220-DATA-SFP

RS232/530/V35 over Fiber

The FRM220-DATA is a fiber modem for high-speed (up to 8.192Mbps) synchronous or low speed synchronous and asynchronous data transmissions (V.35, RS-232, RS-530, X.21 or RS-449) over fiber optical media. When the FRM220-DATA card is placed in the FRM220 rack with SNMP management, in-band management allows viewing the card and remote converter's status, type, version, fiber link status, data link status and alarms. Both card and remote can be configured to enable or disable the port, reset the port, set the data rate, modify the clock mode, and initiate local or far end loop back tests. The FRM220-Data fiber modem may also be paired with the FRM220-E1/T1 for Nx64K transmissions. When placed in a single slot chassis and used standalone without management, the card may be configured by DIP switches.

## Features


- Synchronous or Asynchronous data over fiber
- In-band network management via terminal, web or SNMP in FRM220 chassis
- Selectable I/F, V.35, X.21, RS-530, RS-449, RS-232
- Selectable DCE or DTE mode
- Data rate n x 64kbps, up to 9Mbps
- Multiple clock setting
- Electrical and optical loop back tests
- Compatible with FRM220-E1 on same fiber link for N x 64k
- Standalone RS232 console management via CH01M

## Specifications

<b>Optical Interface</b>	Connector	FRM220-DATA: 1x9 (SC, FC, ST) FRM220-DATA-SFP: SFP LC
	Data rate	36.864Mbps
	Line coding	Scrambled NRZ
	Bit Error Rate	Less than 10 <sup>-10</sup>
	Distance	MM 2km, SM 15/30km, WDM 20/40km
	Wavelength	1310nm, 1550nm
<b>Dimensions</b>	159.5 x 20.8 x 88mm (DxWxH)	
<b>Weight</b>	130g	
<b>Temperature</b>	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)	
<b>Humidity</b>	10 ~ 90% non-condensing	
<b>Certification</b>	CE, FCC	
<b>MTBF</b>	65,000 hrs	

<b>Electrical Interface</b>	Connector	HDB26F w/ adapter cable for V35 X21, RS530, RS449, RS232
	Line Code	NRZ
	Baud Rate	RS-232 up to 384K async V.35/RS-530 up to 9152k sync where n=1 to 143 (64K ~ 9152Kkbps)
	Clock source	Internal, Recovery, External
<b>Standard</b>	ITU-T	
<b>Indications</b>	LED (Power, FX Link, RTS, Test, TD, RD, CTS, DCD)	
<b>Power Input</b>	12VDC	
<b>Power Consumption</b>	< 6W	

## Application

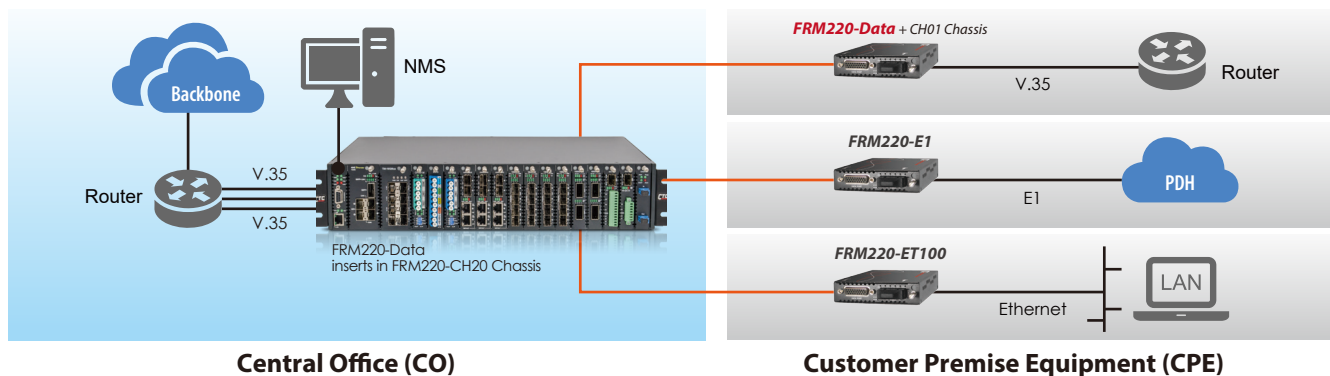

## Ordering Information

Model Name	Description
FRM220-V35	V.35 to fiber card with HD26M to MB34F cable (1m)
FRM220-X21	X.21 to fiber card with HD26M to DB15M cable (1m)
FRM220-RS530	RS530 to fiber card with HD26M to DB25M cable (1m)
FRM220-RS449	RS449 to fiber card with HD26M to DB37M cable (1m)
FRM220-RS232	RS232 to fiber card with HD26M to DB25M cable (1m)
FRM220-V35-SFP	V.35 to fiber card with HD26M to MB34F cable (1m) (SFP module not included)
FRM220-X21-SFP	X.21 to fiber card with HD26M to DB15M cable (1m) (SFP module not included)
FRM220-RS530-SFP	RS530 to fiber card with HD26M to DB25M cable (1m) (SFP module not included)
FRM220-RS449-SFP	RS449 to fiber card with HD26M to DB37M cable (1m) (SFP module not included)
FRM220-RS232-SFP	RS232 to fiber card with HD26M to DB25M cable (1m) (SFP module not included)

Interface Type Connector Type Connectivity Distance  
**FRM220 - [ ] [ ] - [ ] [ ] [ ] [ ]**  
 Example: FRM220 - V35 - SC002

**Interface Cable Adapters**



V35



X21



RS530



RS449



RS232

Connector Type	Connectivity Distance
SC, ST, FC (Not Applicable for SFP Type)	002: 2km 015: 15km 030: 30km 20A: WDM 20km A type 20B: WDM 20km B type 40A: WDM 40km A type 40B: WDM 40km B type