

ICR-4103

4G LTE, 2x SIM, 4x FE + 2x DI/1x DO, 1x RS485, 2x RS232

- ▲ Multi-band connectivity with FDD 4G LTE/ TDD 4G LTE/ 3G WCDMA/2G GSM
- ▲ 4G LTE/ UTP to configure WAN port for failover redundant
- ▲ CE, RED and NCC certified
- ▲ NAT/Port Forward/Routing/IPv6 are compatible with existing IP networks
- ▲ Supports 3x Serial port (1x RS485, 2x RS232) for IoT and automation application, Modbus RTU and Modbus/TCP gateway, MQTT
- ▲ Various VPN protocols for security, Firewall & IPS, Authentication to enhance access security



The industrial grade 4G LTE router ICR-4103 is a high-performance cellular router which is designed to offer fast connectivity over cellular networks for industrial applications. features up to 3 Ethernet ports and provides dual SIM card slots and one Ethernet WAN port which can automatically re-connect and auto-switch to offer cellular network redundancy and ensure uninterrupted connectivity. The ICR-4103 cellular router is integrated with WAN, LAN, SIM, VPN, Firewall, built-in DI/DO and Serial port services.

In addition, ICR-4103 uses the highest level of industrial grade design for connection in the most demanding environments and is an ideal solution for Industrial Internet of Things (IIoT) and M2M (Machine-to-Machine) applications, such as remote control and monitoring, bus ticketing collection system, CCTV, SCADA, digital signage, kiosk and intelligent traffic systems.

Features

- Supports multi-band connectivity with FDD 4G LTE/ TDD 4G LTE/ 3G WCDMA/2G GSM/ LTE Cat4
- 2 SIM card slots 4G LTE antenna, 1x WAN (10/100Base-TX) + 3x LAN (10/100Base-TX UTP), 2x DI + 1x DO, 3x Serial COM port (2x RS232, 1x RS485)
- Highly reliable and secure for mission-critical cellular communications
- Provide flexible options to configure LAN/ WAN ports
- Built-in dual SIM for network redundancy / failover/ roaming over/ back up
- Integrated dual detachable antenna against radio interference
- 4G LTE and WAN port for seamless connection and redundancy
- Supports 3x Serial port (1x RS485, 2x RS232) for IoT and automation application, Modbus RTU and Modbus/TCP gateway, MQTT
- Supports Routing/Firewall, NAT, Virtual Server, DMZ, Port filtering, MAC Filter, URL Filter, IP Filter, VLAN, Static Routing and RIP 1 & 2, VRRP, OSPF V2 & V3, BGP
- Supports VPN, OpenVPN, IPsec (3DES, AES128, AES196, AES256, MD5, SHA-1, SHA256), GRE, PPPTP, L2TP
- IPv6/IPv4 dual stack and all applications are IPv6 ready
- Supports DHCP server and client, PPPoE, Static IP, SNTP, DNS Proxy, DDNS, QoS, Virtual Com, UPnP
- Supports Alarm message : DO, SNMP Trap, E-mail
- Supports SNMP, TR069, Web, Telnet, CLI for management
- Supports dual Image firmware upgrade by Web
- CE, FCC, Rail Traffic EN50121-4 certified
- Safety EN60950-1 certified
- Radio RED ETSI EN301 489-1/-19/-52, EN301 908-1, EN303 413, NCC certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Rugged metal, IP30 protection & Fanless design
- Wide operating temperature -20 ~ 75° C

Specifications

Standard	Cellular MobilComm standard: 4G LTE: FDD-LTE, TDD-LTE 3G: WCDMA 2G: GSM/EDGE
	IEEE 802.3 10Base-T 10Mbit/s Ethernet
	IEEE 802.3u 100Base-TX Fast Ethernet
	IEEE 802.1Q 1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.3x Flow control for Full Duplex
Connector	Cellular MobilComm and WAN: Built-in dual SIM card slots for network redundancy / failover/ roaming over/ back up 2 SMA (female) connector for Antenna (Please see ordering information for optional accessories) 1x 10/100Base-TX RJ45 for WAN port LAN: 3x 10/100Base-TX RJ45 Serial: 1x RS485 and 2x RS232 (one of RS232 could be configured for console) Programmable DI/DO: 2x DI and 1x DO
LTE data rate	Cat 4 ,Max download 150Mbps, Max upload 50 Mbps
Removable terminal block	Provides for Power input, DO, DI1, DI2, COM2 (RS232), COM3 (RS485)
Power Supply	Input 10-32VDC removable terminal block
Power consumption	< 7W
LED	System status (Green) VPN (Green), SIM 1 (Green), SIM 2 (Green) Cell signal Strong / Weak: H/L (Green)
DIP SW for RS485 port	DIP 1 Pull Low : OFF: Disable / ON: Enable DIP 2 Pull High : OFF: Disable / ON: Enable DIP 3 120 ohm terminal resistor : OFF: Disable / ON: Enable
Alarm message	DO for alarm message, with current capacity of 500mA/50VDC maximum, SNMP trap, E-mail, SMS, Alarm trigger by DI, VPN or WAN disconnection
Operation Temperature	-20~75°C
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, Fanless , IP30 grade housing protection
Dimensions	106 x 62.5 x 135mm (D x W x H)
Weight	0.74kg
Installation	Mounting : DIN Rail mounting or Wall mounting (Optional)
MTBF	296,306 Hours (MIL-HDBK-217)
Warranty	5 years


Certification

EMC	CE (EN55024, EN55032)
EMS (Electromagnetic Susceptibility Protection Level)	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Radio	RED ETSI EN301 908-1 RED ETSI EN303 413 RED ETSI EN301 489-1 RED ETSI EN301 489-19 RED ETSI EN301 489-52 NCC (ICR-4103-TW)
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Software Specifications

Network Protocols	IPv4, IPv6, IPv4/IPv6 dual stack, DHCP server and client, DNS Proxy, PPPoE, Static IP, SNTP, VRRP, OSPF V2, OSPF V3, BGP, MQTT, TCP, UDP, ARP
Modbus TCP, Modbus RTU	Gatway between Ethernet and COM3 (RS485) port
Routing/Firewall	NAT, Virtual Server, DMZ, Port filtering, MAC Filter, URL Filter, IP Filter, VLAN, Static Routing and RIP 1, RIP 2
VPN	OpenVPN, IPSec (3DES, AES128, AES196, AES256, MD5, SHA-1, SHA256), GRE, PPPTP, L2TP
MobilComm Connectivity	Two SIM for failover/ roaming over/ back up Seamless multi WAN connections switch (2x SIM and 1x Ethernet WAN)
Others	DDNS, UPnP, QoS Virtual COM for serial COM port
Alarm message	Sent by DO, SMS, SNMP Trap, E-mail
Management	Web GUI for remote and local management CLI Dual Image firmware upgrade by Web GUI, TFTP Syslog monitor SNMP V1, V2c, V3 TR069: TR098 model Access Control list, SSH v2 Remote management via Telnet, SSH v2, HTTPS Local management via Telnet, SSH v2, HTTP/HTTPS

Dimensions

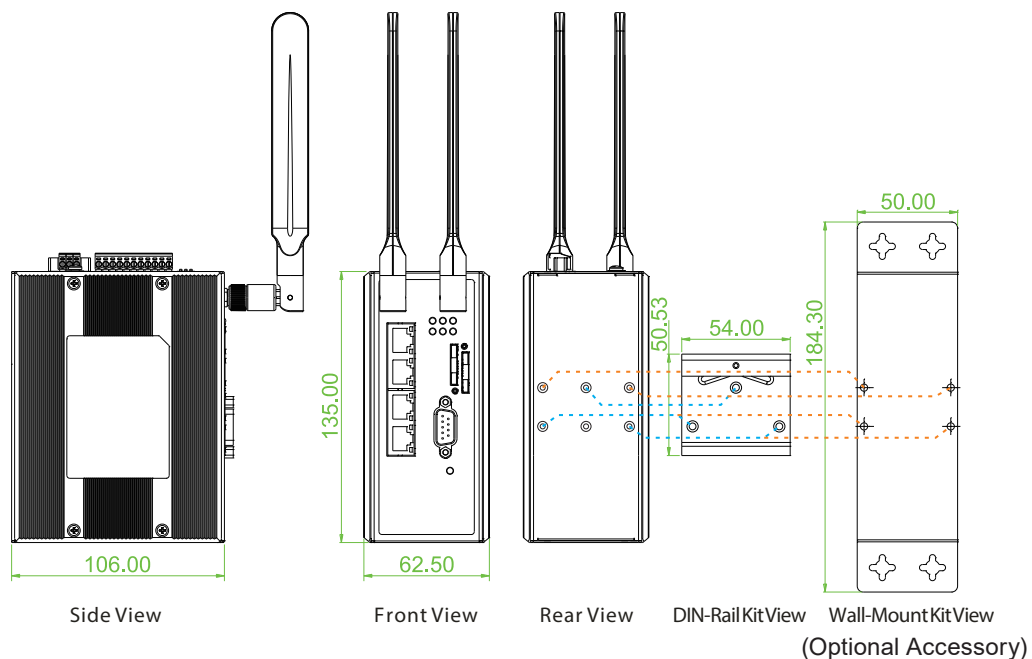

Ordering Information

Model Name	Managed	WAN		LAN			Certification	
		Cellular MobilComm band (2 SIM for Redundancy)	10/100Base-TX	10/100Base-TX	RS232	RS485 (Modbus)	Radio	CE
ICR-4103-EU	V	see Region code table-EU	1	3	2	1	RED	V
ICR-4103-A	V	see Region code table-A	1	3	2	1	RED	V
ICR-4103-TW	V	see Region code table-TW	1	3	2	1	NCC, RED	V

Region Code Table

Region Code	4G LTE		3G	2G	Region
	FDD LTE	TDD LTE	WCDMA	GSM / EDGE	
EU	B1(2100), B3(1800), B5(850), B7(2600), B8(900), B20(800)	B38(2600), B40(2300), B41(2500)	B1(2100), B5(850), B8(900)	B3(1800), B8(900)	Europe, Africa, Middle East, Korea, Thailand, India
A	B2(1900), B4(1700), B12(700)		B2(1900), B4(1700), B5(850)		USA (AT&T, T-Mobile)
TW	B1(2100), B2(1900), B3(1800), B4(1700), B5(850), B7(2600), B8(900), B28(700)	B40(2300)	B1(2100), B2(1900), B5(850), B8(900)	B2(1900), B3(1800), B5(850), B8(900)	ANZ, South America, Taiwan

Optional Accessories

Antenna Accessories

ANT-BASE-01 Antennas Base with Magnetic, SMA (Male) connector, 1.5meter for 4G LTE extension



ANT-BASE-01

Wall Mount Kit Accessories

IND-WMK02 Wall Mount kit for Industrial product (Wide) (184 x 50mm)

Industrial Power Supply

MDR-20-24 Industrial Power, Input 85 ~ 264VAC/120 ~ 370VDC, Output 24VDC, 24W, -20 ~ +70°C