

# IFS-402GSM-4PU

4x FE RJ45 + 4x 100/1000 SFP with 4x 60W PoE 240W, 48VDC

- ▲ Supports IEEE 1588 PTP V2
- ▲ Supports u-Ring, ERPS, MSTP, RSTP, STP for redundant cabling
- ▲ Auto checking and auto reset when PoE PD fail
- ▲ EN50121-4, UL60950-1, EN60950-1, EN62368-1,, EN61000-6-2, EN61000-6-4, CE and FCC certified
- ▲ 4KV surge protection for PoE, RJ45 and SFP ports



The industrial PoE Ethernet switch IFS-402GSM-4PU, Layer 2 managed, has 4 10/100 UTP ports and each port supports up to 60W PoE+. Equipped with two 100/1000 SFP slots for fiber optic connections to meet the requirements for extended transmission distance, fanless design, high MTBF, 4KV surge protection and supports wide operating temperature, redundant 48VDC power input, suitable for heavy-duty applications in harsh environments, such as industrial factory automations, data centers, intelligent transportation systems, military and utility market applications where environmental conditions exceed commercial product specifications.

## Features

- 48VDC (44~57VDC) redundant dual input power
- Provides 4-port IEEE 802.3af / 802.3at PoE+ output (60W per port)
- Cable diagnostics, identifies opens/shorts distance
- Provides 5 ring instances that each can support  $\mu$ -Ring,  $\mu$ -Chain or Sub-Ring type for flexible uses. Supports up to 5 rings in one device (Please see CTC  $\mu$ -Ring white paper for more details and more topology application)
- $\mu$ -Ring for Redundant Cabling, recovery time<10ms in 250 devices
- Supports IEEE 1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- Provides SmartConfig for quick and easy mass Configuration Tool\*
- Supports EMS Management

## Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.3af	PoE (Power over Ethernet)
	IEEE 802.3at	PoE+ (Power over Ethernet enhancements)
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol )
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE 802.3ac	Max frame size extended to 1522Bytes
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.3x	Flow control for Full Duplex
	IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)
	IEEE 802.3az	EEE (Energy Efficient Ethernet)

# Industrial Managed FE PoE Switch

Switch Architecture	Back-Plane (Switching Fabric): 4.8Gbps (Full Wire-Speed)										
Data Processing	Store and Forward										
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode										
Network Connector	4x 10/100Base-TX RJ-45 + 2x 100/1000Base-X SFP RJ-45 UTP port supports Auto negotiation speed, Auto MDI/MDI-X function, SFP port supports 100/1000M dual speed with DDMI										
Console	RS-232 (RJ-45)										
PoE standard & RJ-45 Pin Assignment	4x IEEE 802.3at/ 802.3af PoE+ 4 pairs PoE, 60W/port End-Span, Alternative A and B mode. Positive (V+) : RJ-45 pin 1, 2, 4, 5 Negative (V-) : RJ-45 pin 3, 6, 7, 8										
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)										
Protocols	CSMA/CD										
Reverse Polarity Protection	Supported for power input										
Overload Current Protection	Supported										
CPU Watch Dog	Supported										
Power Supply	Redundant Dual DC 48V (44~57VDC) input power, (Removable terminal block ) (50~57V input is recommended for IEEE 802.3at PoE+ in 30W / 60W applications)										
Power Consumption	<table border="1"> <thead> <tr> <th>Input Voltage</th> <th>Total Power Consumption</th> <th>Device Power Consumption</th> <th>PoE Budget</th> </tr> </thead> <tbody> <tr> <td>50VDC</td> <td>248.5W</td> <td>8.5W</td> <td>240W</td> </tr> </tbody> </table>			Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	50VDC	248.5W	8.5W	240W
Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget								
50VDC	248.5W	8.5W	240W								
PoE Power Budget	Maximum PoE Output power budget 60W / Per Port 240W for total										
LED	System: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Yellow) UTP: 10/100 Link/Active (Green) SFP Slot: Link/Active (Green) PoE: ON (Green)										
Jumbo Frame	9.6KB										
IEEE802.3ac	Max frame size extended to 1522Bytes (allow Q-tag in packet)										
MAC Address Table	8K										
Memory Buffer	512K Bytes for packet buffer										
Device Memory	16M Bytes Flash ROM, 128M Bytes RAM										
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay										
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC										
Removable Terminal Block	Provide 2 redundant power, alarm relay contact, 6 Pin										
Operating Temperature	-10 ~ 60°C (IFS-402GSM-4PU) -40 ~ 75°C (IFS-402GSM-4PUE)										
Operating Humidity	5% to 95% (Non-condensing)										
Storage Temperature	-40 ~ 85°C										
Housing	Rugged Metal, IP30 Protection, Fanless										
Dimensions	106 x 62.5 x 135 mm (D x W x H)										
Weight	0.7kg										
Installation Mounting	DIN Rail mounting, or wall mounting (Optional)										
MTBF	589,078 hours (MIL-HDBK-217)										
Warranty	5 years										

## Certification

EMC	CE (EN55024, EN55032)
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4

EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B
	EN61000-4-3 (RS) Level 3, Criteria A
	EN61000-4-4 (Burst) Level 3, Criteria A
	EN61000-4-5 (Surge) Level 3, Criteria B
	EN61000-4-6 (CS) Level 3, Criteria A
	EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1, EN60950-1, EN62368-1
Surge Protection	4KV for PoE, UTP and Fiber ports
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

## Software Specifications

### Topology

VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID
	IEEE 802.1q VLAN, up to 4094 Groups
	IEEE 802.1ad Q-in-Q
	MAC-based VLAN, up to 256 entries
	IP Subnet-based VLAN, up to 128 entries
	Protocol-based VLAN(Ethernet, SNAP, LLC), up to 128 entries
	VLAN Translation, up to 256 entries
	Private VLAN for port isolation
	GVRP (GARP VLAN Registration Protocol)
MVR ( Multicast VLAN Registration )	
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group
	Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE 802.1d STP, IEEE 802.1w RSTP, IEEE 802.1s MSTP
Multiple $\mu$ -Ring	Up to 5 instances that each supports $\mu$ -Ring, $\mu$ -Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings Recovery time <10ms The maximum number of devices in the ring supports 250 nodes.
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection )	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network

### QoS Features

Class of Service	IEEE 802.1p 8 active priorities queues for per port
Traffic Classification QoS	IEEE 802.1p based CoS, IP Precedence based CoS, IP DSCP based CoS
	QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI
	QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	100~1,000,000 when the "Unit" is "kbps", and 1~1,000 when the "Unit" is "Mbps"
Bandwidth Control for Egress	100~1,000,000 when the "Unit" is "kbps", and 1~1,000 when the "Unit" is "Mbps" Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast

### IP Multicasting Features

IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2
	Port Filtering Profile
	Throttling
	Fast Leave
	Maximum Multicast Group : up to 1022 entries
	Query / Static Router Port

## Security Features

IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
RADIUS	Authentication & Accounting
TACACS+	Authentication
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name Password Authentication	Local Authentication Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	Web, Telnet / SSH , CLI RS-232 console

## Management Features

CLI	Cisco® like CLI
Web UI	Supported
Telnet	Server
SNMP	V1, V2c, V3
Modbus/TCP	Supports for management and monitoring
SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure
FTP client	Supports for upload/download configuration
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	RFC1213 MIB II, Private MIB
UPnP	Supported
BOOTP	Supported
DHCP	Server, Client, Relay, Relay option 82 , Snooping
RARP	Supported
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Supports 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master and Slave
NTP, SNTP	Server/Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED

## IPv6 Features

IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Server/Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SIP, Subnet (32bit) L4: TCP/UDP


## Others Features

Green Ethernet	Supports IEEE 802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management :Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable normal or broken point distance

## Advanced PoE Management

Management	PoE PD failure auto checking, and auto reset when PD fail PoE port on/off weekly scheduling PoE Configuration PoE Enable/Disable Power limit by classification Power feeding priority Total PoE power budget limitation: maximum 240W
------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

## Dimensions

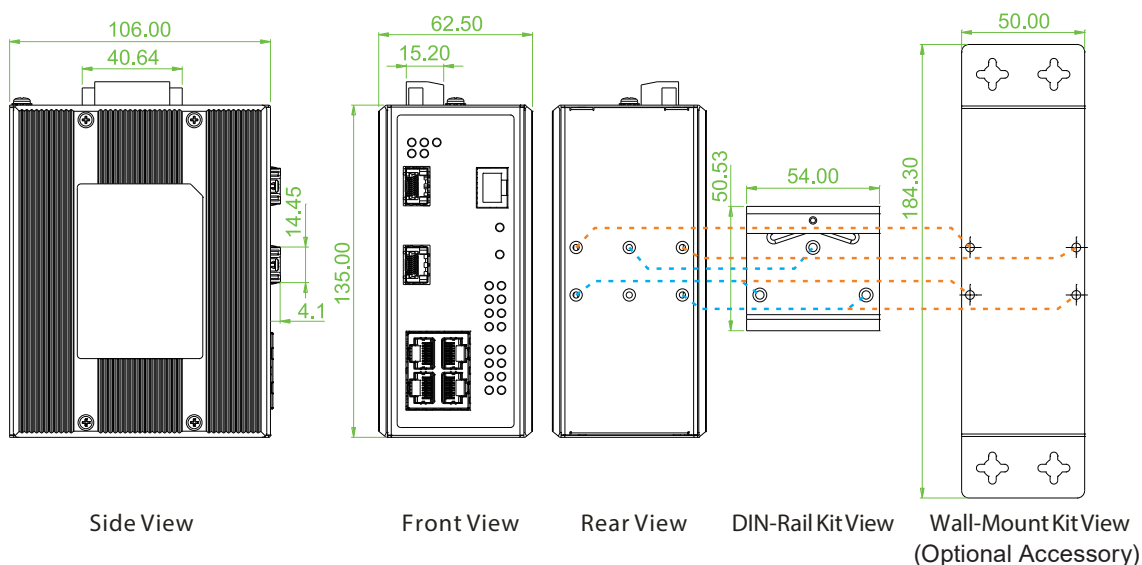

## Ordering Information

Model Name	Total Port	UTP		Fiber		PoE		Input Power		Certification				Operating Temperature
		10/100 Base-TX	100/1000 Base-X	IEEE 802.3at 4 pairs PoE/60W	Power Budget	Redundant	EN50121-4	EN62368-1 UL60950-1 EN60950-1	EN61000-6-2 EN61000-6-4	CE FCC				
IFS-402GSM-4PU	6	4	2 SFP	4	240W	48VDC	V	V	V	V	V	V	-10~60°C	
IFS-402GSM-4PUE	6	4	2 SFP	4	240W	48VDC	V	V	V	V	V	V	-40~75°C	

## Optional Accessories

### Wall Mount Kit

IND-WMK02	Wall Mount kit for Industrial product (Wide) (184 x 50mm)
-----------	-----------------------------------------------------------

### Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with all CTC Union industrial grade Ethernet switches for guaranteed compatibility and performance. Best performance can be guaranteed, even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheets for more items and detailed information.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C(-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 10/100/1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

### Industrial Power Supply

NDR-240-48	Industrial Power, Input 90 ~ 264VAC/127 ~ 370VDC, Output 48VDC, 240W, -20 ~ +70°C (for IGS-402GSM-4PU)
NDR-480-48	Industrial Power, Input 90 ~ 264VAC/127 ~ 370VDC, Output 48VDC, 480W, -20 ~ +70°C (For more ref.)