

IGS-402SM-4PH24

4x GbE RJ45 + 1x 100/1000 SFP + 1x 100M/1G/2.5G SFP with 4x PoE 120W, 24/48VDC

- ▲ Supports IEEE 1588 PTP V2
- ▲ Supports u-Ring, ERPS, EPS, MSTP, RSTP, STP for redundant cabling
- ▲ 24/48VDC (20~57VDC) redundant dual input power with built-in very high efficiency booster
- ▲ Auto checking and auto reset when PoE PD fail
- ▲ EN50121-4, UL60950-1, NEMA-TS2, EN61000-6-2, EN61000-6-4, CE and FCC certified



The industrial PoE Ethernet switch IGS-402SM-4PH24 has 4 Gigabit UTP ports and each port supports 30W PoE+. Equipped with two 100/1000 SFP slots for fiber optic connections to meet the requirements for extended transmission distance, fanless design, high MTBF, supports wide operating temperature, redundant 24/48VDC power input, suitable for heavy-duty applications in harsh environments, such as industrial factory automations, data centers, intelligent transportation systems, military and utility market applications where environmental conditions exceed commercial product specifications.

Features

- Regulated PoE output voltage (52VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter
- Provides 4-port IEEE 802.3af / 802.3at PoE output (30W per Port)
- Cable diagnostics, identifies opens/shorts distance
- Provides 5 ring instances that each can support μ -Ring, μ -Chain or Sub-Ring type for flexible uses. Supports up to 5 rings in one device
- μ -Ring for redundant cabling, recovery time<10ms in 250 devices
- Supports IEEE 1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- Supports EMS Management

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.3cb	2.5GBase-X
	IEEE 802.3af	PoE (Power over Ethernet)
	IEEE 802.3at	PoE+ (Power over Ethernet enhancements)
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	ITU-T G.8031 / Y.1342	EPS (Ethernet Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE 802.3ac	Max frame size extended to 1522Bytes
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.3x	Flow control for Full Duplex

Industrial Managed 1G/2.5G PoE Switch

Standard	IEEE 802.1ad	Stacked VLANs, Q-in-Q			
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization			
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)			
	IEEE 802.3az	EEE (Energy Efficient Ethernet)			
Switch Architecture	Back-Plane (Switching Fabric): 15Gbps (Full Wire-Speed)				
Data Processing	Store and Forward				
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode				
Network Connector	4x 10/100/1000Base-T RJ-45 + 1x FE/GbE SFP + 1x FE/GbE/2.5G SFP				
	RJ-45 UTP port supports Auto negotiation speed, Auto MDI/MDI-X function				
	SFP ports supports 100/1000 or 2.5G with DDMI				
PoE standard & RJ-45 pin assignment	4x IEEE 802.3af /IEEE 802.3at PoE+ End-Span, Alternative A mode. Positive (V+) : RJ-45 pin 1, 2. Negative (V-) : RJ-45 pin 3, 6. Data (1, 2, 3, 6, 4, 5, 7, 8)				
Console	RS-232 (RJ-45)				
Network Cable	UTP/STP Cat. 5e cable or above				
	EIA/TIA-568 100-ohm (100meter)				
Protocols	CSMA/CD				
Reverse Polarity Protection	Supported for power input				
Overload Current Protection	Supported				
CPU Watch Dog	Supported				
Power Supply	Redundant Dual DC 24/48V (20~57VDC) Input power (Removable Terminal Block)				
	Built-in very high efficiency booster(94~97%) to rise up 52VDC for PoE output				
	Regulated PoE output voltage (52VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100 meter				
Power Consumption	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency
	24VDC	135.2W	7.5W	120W	94.0%
	48VDC	132.5W	9W	120W	97.2%
PoE Power Budget	Maximum PoE Output power budget 30W / Per Port, Total 120W				
LED	System: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Amber)				
	UTP: 10/100 Link/Active (Green), 1000 Link/Active (Amber)				
	SFP Slot: Link/Active (Green)				
	PoE: ON (Green)				
Jumbo Frame	9.6KB				
IEEE802.3ac	Max frame size extended to 1522Bytes (allow Q-tag in packet)				
MAC Address Table	8K				
Memory Buffer	512K Bytes for packet buffer				
Device Memory	16M Bytes Flash ROM, 128M Bytes RAM				
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay				
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC				
Removable Terminal Block	Provides 2 redundant power, alarm relay contact, 6 Pin				
Operating Temperature	-10 ~ 60°C (IGS-402SM-4PH24) -40 ~ 75°C (IGS-402SM-4PHE244)				
Operating Humidity	5% to 95% (Non-condensing)				
Storage Temperature	-40 ~ 85°C				
Housing	Rugged Metal, IP30 Protection, Fanless				
Dimensions	106 x 62.5 x 135 mm (D x W x H)				
Weight	0.715kg				
Installation Mounting	DIN Rail mounting, or wall mounting (Optional)				
MTBF	674,963 Hours (MIL-HDBK-217)				
Warranty	5 years				

Certification

EMC	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A,CE
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B
	EN61000-4-3 (RS) Level 3, Criteria A
	EN61000-4-4 (Burst) Level 3, Criteria A
	EN61000-4-5 (Surge) Level 3, Criteria B
	EN61000-4-6 (CS) Level 3, Criteria A
	EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1
Railway Traffic	EN50121-4
Traffic Control	NEMA-TS2
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Software Specifications

Topology

VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID
	IEEE 802.1q VLAN, up to 4094 Groups
	IEEE 802.1ad Q-in-Q
	MAC-based VLAN, up to 256 entries
	IP Subnet-based VLAN, up to 128 entries
	Protocol-based VLAN(Ethernet, SNAP, LLC), up to 128 entries
	VLAN Translation, up to 256 entries
	Private VLAN for port isolation
	GVRP (GARP VLAN Registration Protocol)
	MVR (Multicast VLAN Registration)
	Voice VLAN
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group
	Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE 802.1d STP
	IEEE 802.1w RSTP
	IEEE 802.1s MSTP
Multiple μ -Ring	Up to 5 instances that each supports μ -Ring, μ -Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings.
	Recovery time <10ms
	The maximum number of devices in the ring supports 250 nodes.
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms
	Single Ring, Sub-Ring, Multiple ring topology network
ITU-T G.8031 / Y.1342 EPS (Ethernet Protection Switching)	Supported

QoS Features

Class of Service	IEEE 802.1p 8 active priorities queues for per port
Traffic Classification QoS	IEEE 802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	100~1,000,000 when the "Unit" is "kbps", and 1~1,000 when the "Unit" is "Mbps"
Bandwidth Control for Egress	100~1,000,000 when the "Unit" is "kbps", and 1~1,000 when the "Unit" is "Mbps" Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast

IP Multicasting Features

IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling, Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
---------------------	--

Security Features

IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
RADIUS	Authentication & Accounting
TACACS+	Authentication
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name Password Authentication	Local Authentication Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	Web, Telnet / SSH, CLI RS-232 console

Management Features

CLI	Cisco® like CLI
Web UI	Supported
Telnet	Supports for management and monitoring
SNMP	V1, V2c, V3
sFlow	Supported
ModBus/TCP	Supports management and monitoring
SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure
FTP client	Supports for upload/download configuration
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	RFC1213 MIB II, Private MIB
UPnP	Supported
BOOTP	Supported
DHCP	Server, Client, Relay, Relay option 82 , Snooping
RARP	Supported
IP Source Guard	Supported
Port Mirroring	Supported

Industrial Managed 1G/2.5G PoE Switch

Event Syslog	Syslog server (RFC3164)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Supports 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master and Slave
NTP, SNTP	Server/Client
LLDP (IEEE802.1ab)	Link Layer Discovery Protocol LLDP-MED

IPv6 Features

IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Server/Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SIP, Subnet (32bit) L4: TCP/UDP


Others Features

Green Ethernet	Supports IEEE 802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management : Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable normal or broken point distance

Advanced PoE

Management	PoE PD failure auto checking ,and auto reset when PD fail PoE port on/off weekly scheduling PoE Configuration PoE Enable/Disable Power limit by classification Power limit by management Power feeding priority Total PoE power budget limitation: maximum 120W
------------	--

Dimensions

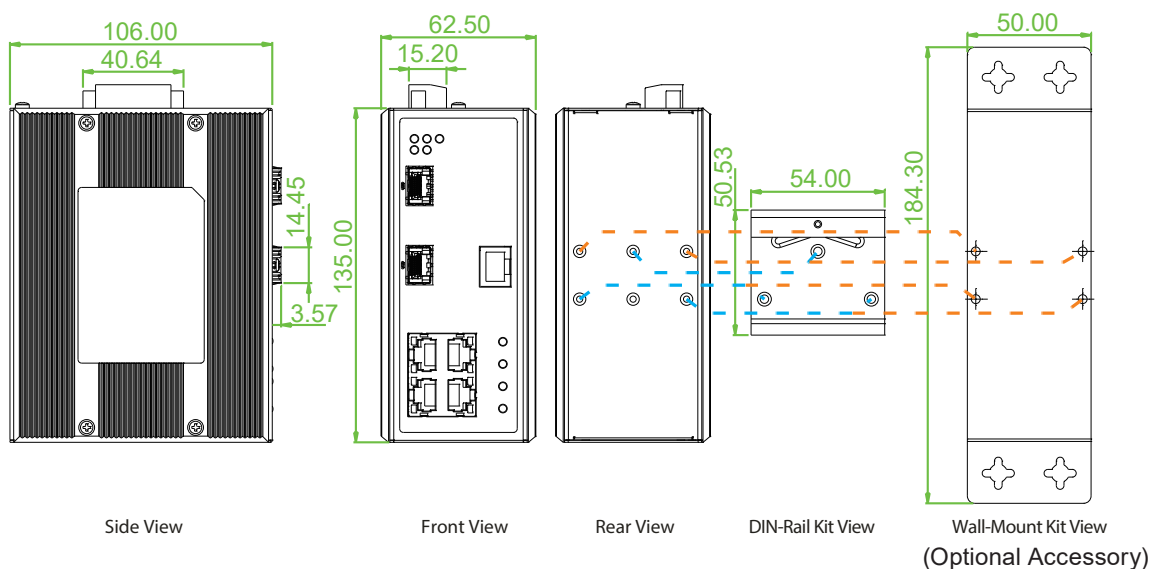

Ordering Information

Model Name	Total Port	UTP		Fiber		PoE		Input Power	Certification					Operating Temperature
		10/100/1000 Base-T	100/1000 Base-X	100/1000/2.5G Base-X	IEEE802.3 at/af	Power Budget	Redundant		UL60950-1	EN50121-4	NEMA-TS2	EN61000-6-2 EN61000-6-4	CE, FCC	
IGS-402SM-4PH24	6	4	1 SFP	1 SFP	4	120W	24/48VDC	V	V	V	V	V	-10~60°C	
IGS-402SM-4PHE24	6	4	1 SFP	1 SFP	4	120W	24/48VDC	V	V	V	V	V	-40~75°C	

Optional Accessories

■ Wall Mount Kit

IND-WMK02	Wall Mount kit for Industrial product (Wide) (184 x 50mm)
-----------	---

■ Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with all CTC Union industrial grade Ethernet switches for guaranteed compatibility and performance. Best performance can be guaranteed, even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheets for more items and detailed information.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C(-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 10/100/1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

■ Industrial Power Supply

NDR-120-48	Industrial Power, Input 90 ~ 264VAC/127 ~ 370VDC, Output 48VDC, 120W, -20 ~ +70°C
------------	---