

## IGS+803SM

**8x GbE RJ45 + 3x 100/1000Base-X SFP**

- » Supports IEEE 1588 PTP V2
- » Supports u-Ring, ERPS, EPS, MSTP, RSTP, STP for Redundant Cabling
- » Cable Diagnostics, Identifies Opens/Shorts Distance
- » UL60950-1, EN60950-1, EN62368-1, EN50121-4, NEMA-TS2, EN61000-6-2, EN61000-6-4, CE and FCC Certified



The industrial managed Ethernet switch IGS+803SM has 8 Gigabit UTP ports, equipped with 3 100/1000Base-X SFP slots for fiber optic connections to meet the requirements for extended transmission distance, fanless design, high MTBF, 4KV surge protection and supports wide operating temperature, redundant 12/24/48VDC power input, suitable for heavy-duty applications in harsh environments, such as industrial factory automations, data centers, intelligent transportation systems, military and utility market applications where environmental conditions exceed commercial product specifications.

### Features

- Redundant dual DC power input 12/24/48VDC (9.6~60VDC)
- 2.25K VDC Hi-pot isolation protection for Ethernet ports and power
- 4KV surge protection for UTP and fiber ports
- Provides 5 instances that each can support μ-Ring, μ-Chain or Sub-Ring type for flexible uses.  
(Please see CTC μ-Ring white paper for more details and more topology application)
- μ-Ring for Redundant Cabling, recovery time<10ms in 250 devices
- Supports IEEE 1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- Supports EMS Management

### Specifications

Standard	Specification
IEEE 802.3	10Base-T 10Mbit/s Ethernet
IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
IEEE 802.1d	STP (Spanning Tree Protocol)
IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol )
IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
ITU-T G.8031 / Y.1342	EPS (Ethernet Protection Switching)
IEEE 802.1Q	Virtual LANs (VLAN)
IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
IEEE 802.3ac	Max frame size extended to 1522Bytes.
IEEE 802.3ad	Link aggregation for parallel links with LACP (Link Aggregation Control Protocol)
IEEE 802.3x	Flow control for Full Duplex
IEEE 802.1ad	Stacked VLANs, Q-in-Q
IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)
IEEE 802.3az	EEE (Energy Efficient Ethernet)

# Industrial Managed GbE Switch

10

<b>VLAN ID</b>	4094 IEEE 802.1Q VLAN ID			
<b>Switch Architecture</b>	Back-Plane (Switching Fabric): 22Gbps (Full Wire-Speed)			
<b>Data Processing</b>	Store and Forward			
<b>Flow Control</b>	IEEE 802.3x for full duplex mode Back pressure for half duplex mode			
<b>Network Connector</b>	8x 10/100/1000Base-T RJ-45 + 3x 100/1000Base-X SFP RJ-45 UTP port supports Auto negotiation speed, Auto MDI/MDI-X function SFP port supports dual speed with DDMI			
<b>Console</b>	RS-232 (RJ-45)			
<b>Network Cable</b>	UTP/STP Cat. 5e cable or above EIA/TIA-568 100-ohm (100meter)			
<b>Protocols</b>	CSMA/CD			
<b>Reverse Polarity Protection</b>	Supported			
<b>Overload Current Protection</b>	Supported			
<b>CPU Watch Dog</b>	Supported			
<b>Power Supply</b>	Redundant Dual DC 12/24/48VDC (9.6~60VDC) Input power (Removable Terminal Block)			
<b>Power Consumption</b>	<b>Input Voltage</b>	<b>12VDC</b>	<b>24VDC</b>	<b>48VDC</b>
	IGS+803SM	8.6W	10.8W	11.5W
<b>LED</b>	System: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Yellow) UTP: 10/100 Link/Active (Green), 1000 Link/Active (Amber) SFP Slot: Link/Active (Green)			
<b>Jumbo Frame</b>	9.6KB			
<b>IEEE 802.3ac</b>	Max frame size extended to 1522Bytes (allow Q-tag in packet)			
<b>MAC Address Table</b>	8K			
<b>Memory Buffer</b>	512K Bytes for packet buffer			
<b>Device Memory</b>	16M Bytes Flash ROM, 128M Bytes RAM			
<b>Warning Message</b>	System Syslog, SMTP/ e-mail event message, alarm relay			
<b>Alarm Relay Contact</b>	Relay outputs with current carrying capacity of 1A @24VDC			
<b>Removable Terminal Block</b>	Provide 2 redundant power, alarm relay contact, 6 Pin			
<b>Operating Temperature</b>	-10 ~ 60°C (IGS+803SM) -40 ~ 75°C (IGS+803SM-E)			
<b>Operating Humidity</b>	5% to 95% (Non-condensing)			
<b>Storage Temperature</b>	-40 ~ 85°C			
<b>Housing</b>	Rugged Metal, IP30 Protection and Fanless			
<b>Dimensions</b>	106 x 72 x 152mm (D x W x H)			
<b>Weight</b>	0.81kg			
<b>Installation Mounting</b>	DIN Rail mounting or wall mounting (optional)			
<b>MTBF</b>	688,248 Hours (MIL-HDBK-217)			
<b>Warranty</b>	5 years			
<b>Certification</b>				
<b>EMC</b>	CE (EN55032, EN55024)			
<b>EMI (Electromagnetic Interference)</b>	FCC Part 15 Subpart B Class A, CE EN55032 Class A			
<b>Railway Traffic</b>	EN50121-4			
<b>Traffic Control</b>	NEMA-TS2			
<b>Immunity for Heavy Industrial Environment</b>	EN61000-6-2			
<b>Emission for Heavy Industrial Environment</b>	EN61000-6-4			
<b>EMS (Electromagnetic Susceptibility) Protection Level</b>	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A			

# Industrial Managed GbE Switch

10

<b>Safety</b>	UL60950-1, EN60950-1, EN62368-1
<b>Hipot</b>	DC 2.25KV for power to chassis ground, Ethernet ports to chassis ground
<b>Surge Protection</b>	4KV for UTP and Fiber ports
<b>Shock</b>	IEC 60068-2-27
<b>Freefall</b>	IEC 60068-2-32
<b>Vibration</b>	IEC 60068-2-6

## Software Specifications

### Topology

<b>VLAN</b>	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN ID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries Private VLAN for port isolation GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration) Voice VLAN
<b>Link Aggregation (Port Trunk)</b>	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
<b>Spanning Tree</b>	IEEE 802.1d STP IEEE 802.1w RSTP IEEE 802.1s MSTP
<b>Multiple <math>\mu</math>-Ring</b>	Up to 5 instances that each supports $\mu$ -Ring, $\mu$ -Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings Recovery time <10ms The maximum number of devices in the ring supports 250 nodes
<b>Loop Protection</b>	Supported
<b>ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)</b>	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
<b>ITU-T G.8031 / Y.1342 EPS (Ethernet Protection Switching)</b>	Supported

### QoS Features

<b>Class of Service</b>	IEEE 802.1p 8 active priorities queues for per port
<b>Traffic Classification QoS</b>	IEEE 802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL (QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI, Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
<b>Bandwidth Control for Ingress</b>	100~1,000,000 when the "Unit" is "kbps" and 1~1,000 when the "Unit" is "Mbps"
<b>Bandwidth Control for Egress</b>	100~1,000,000 when the "Unit" is "kbps" and 1~1,000 when the "Unit" is "Mbps" Per queue / Port shaper
<b>DiffServ (RF 2474) Remarking</b>	
<b>Storm Control</b>	for Unicast, Broadcast, Multicast

### IP Multicasting Features

<b>IGMP / MLD Snooping</b>	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling, Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
----------------------------	--

# Industrial Managed GbE Switch

10

## Security Features

<b>IEEE 802.1X</b>	Port-Based
	MAC-Based
<b>ACL</b>	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
<b>RADIUS</b>	Authentication & Accounting
<b>TACACS+</b>	Authentication
<b>HTTPS, HTTP</b>	Supported
<b>SSL / SSH v2</b>	Supported
<b>User Name Password Authentication</b>	Local Authentication
	Remote Authentication (via RADIUS / TACACS+)
<b>Management Interface Access Filtering</b>	Web, Telnet / SSH, CLI RS-232 console

## Management Features

<b>CLI</b>	Cisco® like CLI
<b>WeB UI</b>	Supported
<b>Telnet</b>	Server
<b>SNMP</b>	V1, V2c, V3
<b>sFlow</b>	Supported
<b>Modbus/TCP</b>	Support for management and monitoring
<b>SW &amp; Configuration Upgrade</b>	TFTP, HTTP
	Redundant firmware in case of upgrade failure
<b>FTP client</b>	Support for upload/download configuration
<b>RMON</b>	RMON I (1, 2, 3, 9 group), RMON II
<b>MIB</b>	RFC1213 MIB II, Private MIB
<b>UPnP</b>	Supported
<b>BOOTP</b>	Supported
<b>DHCP</b>	Server, Client, Relay, Relay option 82, Snooping
<b>RARP</b>	Supported
<b>IP Source Guard</b>	Supported
<b>Port Mirroring</b>	Supported
<b>Event Syslog</b>	Syslog server (RFC3164)
<b>Warning Message</b>	System syslog, e-mail, alarm relay
<b>DNS</b>	Client, Proxy
<b>IEEE 1588 PTP V2</b>	Supports 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master and Slave
<b>NTP, SNTP</b>	Client
<b>LLDP (IEEE 802.1ab)</b>	Link Layer Discovery Protocol
	LLDP-MED

## IPv6 Features

<b>IPv6 Management</b>	Telnet Server/ICMP v6
<b>SNMP over IPv6</b>	Supported
<b>HTTP over IPv6</b>	Supported
<b>SSH over IPv6</b>	Supported
<b>IPv6 Telnet</b>	Supported
<b>IPv6 NTP, SNTP</b>	Client
<b>IPv6 TFTP</b>	Supported
<b>IPv6 QoS</b>	Supported
<b>IPv6 ACL</b>	Number of rules: up to 256 entries
	for L2 / L3 / L4
	L2 : Mac address SA/DA/VLAN
	L3: IP address SIP, Subnet (32bit) L4: TCP/UDP


# Industrial Managed GbE Switch

10

## Others Features

Green Ethernet	Supports IEEE 802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption
	Determine the cable length and lowering the power for ports with short cables
	Lower the power for a port when there is no link
	LED Power Management: Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable normal or broken point distance

## Dimensions

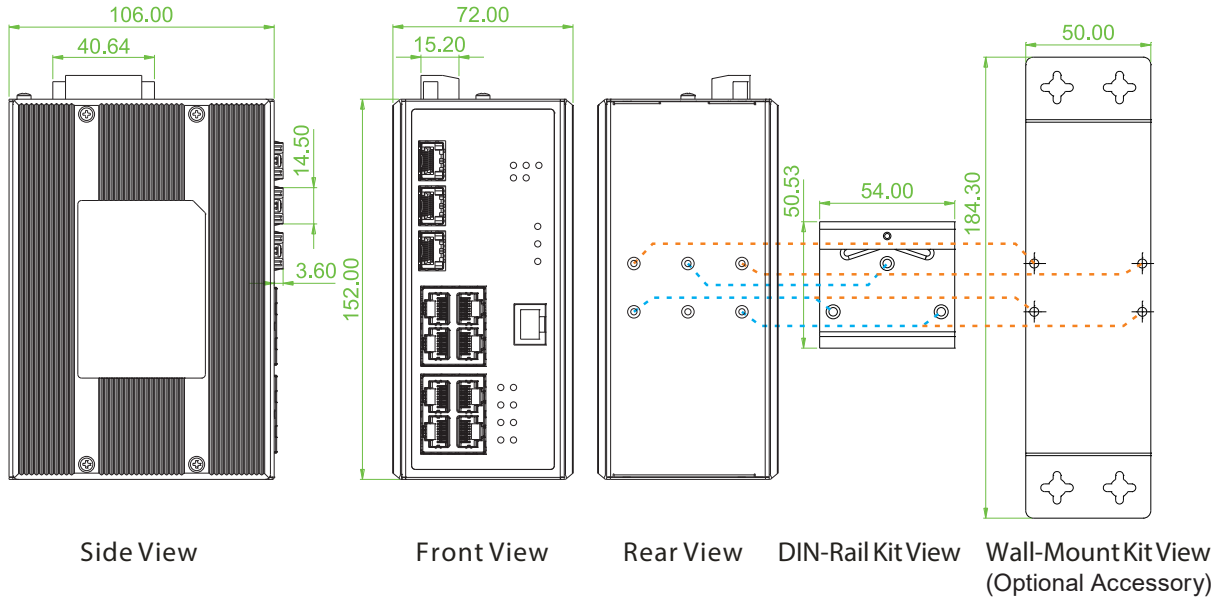

## Ordering Information

Model Name	Managed	Total Port	RJ45	SFP	Power Input	Certification				Operating Temperature
			10/100/1000 Base-T	100/1000 Base-X	Redundant	NEMA TS2	UL60950-1 EN60950-1 EN62368-1	EN50121-4	CE, FCC EN61000-6-2 EN61000-6-4	
IGS+803SM	V	11	8	3	12/24/48VDC	V	V	V	V	-10~60°C
IGS+803SM-E	V	11	8	3	12/24/48VDC	V	V	V	V	-40~75°C

## Optional Accessories

### Wall Mount Kit

IND-WMK02 Wall Mount kit for Industrial product (Wide) (184 x 50mm)

### Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with all CTC Union industrial grade Ethernet switches for guaranteed compatibility and performance. Best performance can be guaranteed, even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheets for more items and detailed information.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 10/100/1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

### Industrial Power Supply

MDR-20-24	Industrial Power, Input 85 ~ 264VAC/120 ~ 370VDC, Output 24VDC, 24W, -20 ~ 70°C
MDR-40-48	Industrial Power, Input 85 ~ 264VAC/120 ~ 370VDC, Output 48VDC, 40W, -20 ~ 70°C