IGS+803SM

8x GbE RJ45 + 3x 100/1000Base-X SFP

10

- *Supports IEEE 1588 PTP V2*
- *Supports u-Ring, ERPS, EPS, MSTP, RSTP, STP for Redundant Cabling*
- *Cable Diagnostics, Identifies Opens/Shorts Distance*
- *UL60950-1, EN60950-1, EN 62368-1, EN50121-4, NEMA-TS2, EN61000-6-2, EN61000-6-4, CE and FCC Certified*

UL60950-1 EN62368-1 EN50121-4 EN61000-6-2 EN61000-6-4 μ-Ring IEEE 1588v2

The industrial managed Ethernet switch IGS+803SM has 8 Gigabit UTP ports, equipped with 3 100/1000Base-X SFP slots for fiber optic connections to meet the requirements for extended transmission distance, fanless design, high MTBF, 4KV surge protection and supports wide operating temperature, redundant 12/24/48VDC power input, suitable for heavy-duty applications in harsh environments, such as industrial factory automations, data centers, intelligent transportation systems, military and utility market applications where environmental conditions exceed commercial product specifications.

Features

- Redundant dual DC power input 12/24/48VDC (9.6~60VDC)
- 2.25K VDC Hi-pot isolation protection for Ethernet ports and power
- 4KV surge protection for UTP and fiber ports
- Provides 5 instances that each can support μ-Ring, μ-Chain or Sub-Ring type for flexible uses.
  (Please see CTC μ-Ring white paper for more details and more topology application)
- μ-Ring for Redundant Cabling, recovery time<10ms in 250 devices
- Supports IEEE 1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- Supports EMS Management

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.1D	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	ITU-T G.8031 / Y.1342	EPS (Ethernet Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE 802.3ac	Max frame size extended to 1522Bytes.
	IEEE 802.3ad	Link aggregation for parallel links with LACP (Link Aggregation Control Protocol)
	IEEE 802.3x	Flow control for Full Duplex
	IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)
	IEEE 802.3az	EEE (Energy Efficient Ethernet)

VLAN ID	4094 IEEE 802.1Q VLAN ID
Switch Architecture	Back-Plane (Switching Fabric): 22Gbps (Full Wire-Speed)
Data Processing	Store and Forward
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode
Network Connector	8x 10/100/1000Base-T RJ-45 + 3x 100/1000Base-X SFP
	RJ-45 UTP port supports Auto negotiation speed, Auto MDI/MDI-X function
	SFP port supports dual speed with DDMI
Console	RS-232 (RJ-45)
Network Cable	UTP/STP Cat. 5e cable or above
	EIA/TIA-568 100-ohm (100meter)
Protocols	CSMA/CD
Reverse Polarity Protection	Supported
Overload Current Protection	Supported
CPU Watch Dog	Supported
Power Supply	Redundant Dual DC 12/24/48VDC (9.6~60VDC) Input power (Removable Terminal Block)
Power Consumption	

Input Voltage	12VDC	24VDC	48VDC
IGS+803SM	8.6W	10.8W	11.5W

LED	System: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Yellow)
	UTP: 10/100 Link/Active (Green), 1000 Link/Active (Amber)
	SFP Slot: Link/Active (Green)
Jumbo Frame	9.6KB
IEEE 802.3ac	Max frame size extended to 1522Bytes (allow Q-tag in packet)
MAC Address Table	8K
Memory Buffer	512K Bytes for packet buffer
Device Memory	16M Bytes Flash ROM, 128M Bytes RAM
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay
Alarm Relay Contact	Relay outputs with current carrying capacity of 1A @24VDC
Removable Terminal Block	Provide 2 redundant power, alarm relay contact, 6 Pin
Operating Temperature	-10 ~ 60°C (IGS+803SM) -40 ~ 75°C (IGS+803SM-E)
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection and Fanless
Dimensions	106 x 72 x 152mm (D x W x H)
Weight	0.81kg
Installation Mounting	DIN Rail mounting or wall mounting (optional)
MTBF	688,248 Hours (MIL-HDBK-217)
Warranty	5 years

Certification

EMC	CE (EN55032, EN55024)
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE EN55032 Class A
Railway Traffic	EN50121-4
Traffic Control	NEMA-TS2
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B
	EN61000-4-3 (RS) Level 3, Criteria A
	EN61000-4-4 (Burst) Level 3, Criteria A
	EN61000-4-5 (Surge) Level 3, Criteria B
	EN61000-4-6 (CS) Level 3, Criteria A
	EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A

Safety	UL60950-1, EN60950-1, EN 62368-1
Hipot	DC 2.25KV for power to chassis ground, Ethernet ports to chassis ground
Surge Protection	4KV for UTP and Fiber ports
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

10

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN ID
	IEEE 802.1q VLAN, up to 4094 Groups
	IEEE 802.1ad Q-in-Q
	MAC-based VLAN, up to 256 entries
	IP Subnet-based VLAN, up to 128 entries
	Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries
	VLAN Translation, up to 256 entries
	Private VLAN for port isolation
	GVRP (GARP VLAN Registration Protocol)
	MVR (Multicast VLAN Registration)
	Voice VLAN
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group
	Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE 802.1D STP
	IEEE 802.1w RSTP
	IEEE 802.1s MSTP
Multiple μ-Ring	Up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings
	Recovery time <10ms
	The maximum number of devices in the ring supports 250 nodes
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms
	Single Ring, Sub-Ring, Multiple ring topology network
ITU-T G.8031 / Y.1342 EPS (Ethernet Protection Switching)	Supported
QoS Features	
Class of Service	IEEE 802.1p 8 active priorities queues for per port
Traffic Classification QoS	IEEE 802.1p based CoS
	IP Precedence based CoS
	IP DSCP based CoS
	QCL (QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI, Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	100~1,000,000 when the "Unit" is "kbps" and 1~1,000 when the "Unit" is "Mbps"
Bandwidth Control for Egress	100~1,000,000 when the "Unit" is "kbps" and 1~1,000 when the "Unit" is "Mbps"
	Per queue / Port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Features	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2
	Port Filtering Profile
	Throttling, Fast Leave
	Maximum Multicast Group : up to 1022 entries
	Query / Static Router Port

Security Features	
IEEE 802.1X	Port-Based
	MAC-Based
ACL	Number of rules : up to 256 entries
	for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
RADIUS	Authentication & Accounting
TACACS+	Authentication
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name Password Authentication	Local Authentication
	Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	Web, Telnet / SSH, CLI RS-232 console
Management Features	
CLI	Cisco® like CLI
WeB UI	Supported
Telnet	Server
SNMP	V1, V2c, V3
sFlow	Supported
Modbus/TCP	Support for management and monitoring
SW & Configuration Upgrade	TFTP, HTTP
	Redundant firmware in case of upgrade failure
FTP client	Support for upload/download configuration
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	RFC1213 MIB II, Private MIB
UPnP	Supported
BOOTP	Supported
DHCP	Server, Client, Relay, Relay option 82, Snooping
RARP	Supported
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE 1588 PTP V2	Supports 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master and Slave
NTP, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol
	LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries
	for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SIP, Subnet (32bit) L4: TCP/UDP

Others Features	
Green Ethernet	Supports IEEE 802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption
	Determine the cable length and lowering the power for ports with short cables
	Lower the power for a port when there is no link
	LED Power Management: Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable normal or broken point distance

10

Dimensions

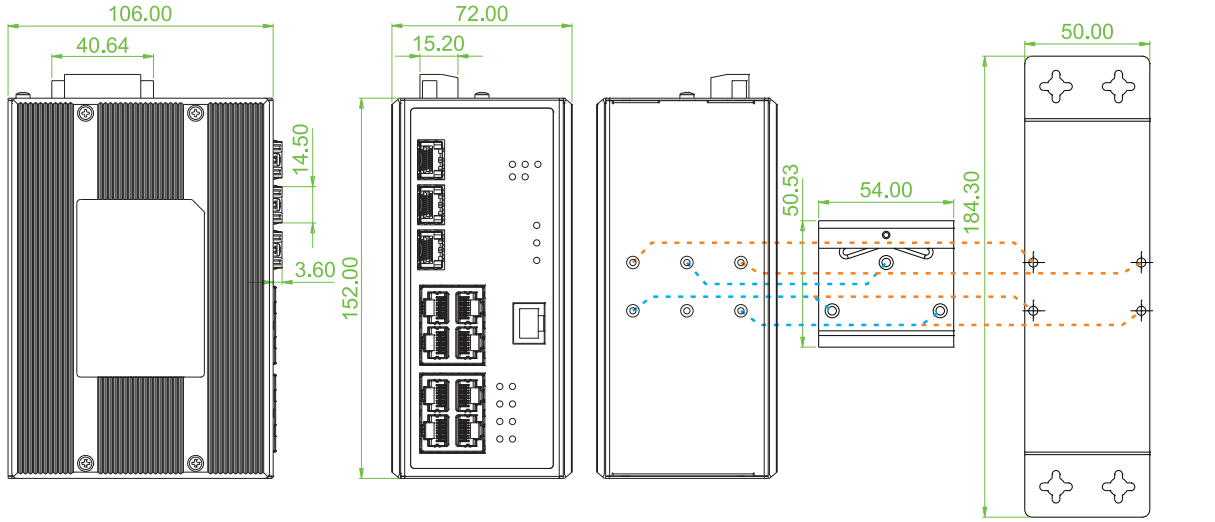

Side View | Front View | Rear View | DIN-Rail Kit View | Wall-Mount Kit View (Optional Accessory)

Ordering Information

Model Name	Managed	Total Port	RJ45	SFP	Power Input	Certification				Operating Temperature
			10/100/1000 Base-T	100/1000 Base-X	Redundant	NEMA TS2	UL60950-1 EN60950-1 EN 62368-1	EN50121-4	CE, FCC EN61000-6-2 EN61000-6-4	
IGS+803SM	V	11	8	3	12/24/48VDC	V	V	V	V	-10~60°C
IGS+803SM-E	V	11	8	3	12/24/48VDC	V	V	V	V	-40~75°C

Optional Accessories

■ Wall Mount Kit

IND-WMK02	Wall Mount kit for Industrial product (Wide) (184 x 50mm)

■ Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with all CTC Union industrial grade Ethernet switches for guaranteed compatibility and performance. Best performance can be guaranteed, even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheets for more items and detailed information.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter,wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 10/100/1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

■ Industrial Power Supply

MDR-20-24	Industrial Power, Input 85 ~ 264VAC/120 ~ 370VDC, Output 24VDC, 24W, -20 ~ 70°C
MDR-40-48	Industrial Power, Input 85 ~ 264VAC/120 ~ 370VDC, Output 48VDC, 40W, -20 ~ 70°C