

EN50155 Managed 10G PoE Switch

5 ITP-12164XTM-12PH



12x FE M12 with 8x PoE + 16x GbE M12 with 4x PoE and 4x 10G M12, 80W, 24/48/72/110VDC

- » 24/48/72/96/110VDC Redundant Dual Isolated Power Input
- » Regulated PoE Output Voltage
- » Auto Checking and Auto Reset when PoE PD Fail
- » EN50155, EN50121-4, EN45545-2, EN61000-6-2, EN61000-6-4, CE and FCC Certified

NEW



The EN50155 certified managed PoE switch ITP-12164XTM-12PH, that provides 4 10Gigabit, 16 Gigabit M12 X-code Ethernet ports and 12 Megabit M12 D-code, features total 12 ports PoE and supports a variety of PoE operation functions, including automatic detection of PoE device power, automatic reset, PoE scheduling, etc.

Designed for heavy industrial, vehicle and rolling stock applications, utilizing M12 connectors to ensure secure connections and reliable operation, withstand environmental disturbances such as vibration and shock, uses M12 K-code connector 24/48/72/110VDC switching power input design compatible with variety railway and vehicle's power source requirement. EN50155 certification covers operating temperature, mains input voltage, surge, ESD, vibration and shock, making the switch suitable for vehicle, rolling stock applications.

Features

- M12 (D-code, X-code, K-code) connector against vibration and shock, M12 D-code for FE port, X-code for GbE or 10G port, K-code for power
- Cable diagnostics, identifies opens/shorts distance
- STP, RSTP, MSTP, ITU-T G.8031 ERP, ITU-T G.8032 Ethernet Protection Ring (ERPS) for redundant cabling
- Provides up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses.
(Please see CTC Union's μ-Ring white paper for more details)
- μ-Ring for Redundant Cabling, recovery time < 50ms in 250 maximum devices
- Supports TTDP for train application
- Supports EMS Management

Specifications

Standard	Specification
IEEE 802.3	10Base-T 10Mbit/s Ethernet
IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
IEEE 802.3an	10GBase-T 10G bit/s Ethernet over twisted pair
IEEE 802.1d	STP (Spanning Tree Protocol)
IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
ITU-T G.8031 / Y.1342	EPS (Ethernet Protection Switching)
IEEE 802.1Q	Virtual LANs (VLAN)
IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
IEEE 802.3ac	Max frame size extended to 1522Bytes
IEEE 802.3ad	Link aggregation for parallel links with LACP (Link Aggregation Control Protocol)
IEEE 802.1AX	Link aggregation for parallel links with LACP (Link Aggregation Control Protocol)
IEEE 802.3x	Flow control for Full Duplex
IEEE 802.3af	PoE (Power over Ethernet)

EN50155 Managed 10G PoE Switch

5

Standard	IEEE 802.3at	PoE+ (Power over Ethernet enhancements)		
	IEEE 802.1ad	Stacked VLANs, Q-in-Q		
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization		
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)		
	IEEE 802.3az	EEE (Energy Efficient Ethernet)		
VLAN ID	4094	IEEE802.1Q VLAN ID		
Switch Architecture	114.4Gbps (Full wire-speed)			
Data Processing	Store and Forward			
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode			
PoE Port	12x PoE port (8x PoE for D-code FE port, 4x PoE for X-code GbE port) Maximum PoE output power budget 80W (30W/port), Regulated PoE output voltage at 52VDC IEEE 802.3af / IEEE 802.3at End-Span, Alternative A mode			
Network Connector	12x M12 D-code Female for 10/100Base-TX UTP, with 8x PoE 16x M12 X-code Female for 10/100/1000Base-T UTP, with 4x PoE 4x M12 X-code Female for 100/1G/2.5G/5G/10G Base-T UTP UTP port provides auto negotiation speed, Auto MDI/ MDI-X, Full/Half duplex function 4x 10G UTP port for 2 set bypass			
Console	RS-232 (5-pin A-Code M12 male)			
2x Rotary Switch (0~15)	1 for Switch IP setting, 1 for Gateway IP setting			
Network Cable	UTP/STP Cat. 5e cable or above			
	EIA/TIA-568 100-ohm (100meter)			
Protocols	CSMA/CD			
Reverse Polarity Protection	Supported			
Overload Current Protection	Supported			
CPU Watch Dog	Supported			
LED	System: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Amber)			
	UTP: 10/100/1G/2.5G/5G Link/Active (Green), 10G Link/Active (Blue)			
	PoE : ON (Green)			
Jumbo Frame	10KB			
MAC Address Table	32K			
Memory Buffer	4M Bytes for packet buffer			
Device Memory	128M Bytes Flash ROM, 1G Bytes RAM			
Power Supply	Provides 1x M12 K-code (5-Pin, male) for redundant dual isolated DC 24/48/72/96/110VDC wide input power Regulated PoE output voltage (52VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter			
Power Consumption	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget
	24 VDC	136W	49W	80W
	48 VDC	129W	48W	80W
	110 VDC	128W	48W	80W
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay			
Alarm Relay Contact	5-pin M12 A-code male, Relay outputs with current carrying capacity of 1A @24VDC			
Operating Temperature	-40 ~ 60°C			
Operating Humidity	5% to 95% (Non-condensing)			
Storage Temperature	-40 ~ 85°C			
Housing	Rugged Metal, Fanless and IP40 grade housing protection			
Dimensions	128 x 418 x 207mm (D x W x H)			
Weight	8.1Kg			
Installation Mounting	Wall mounting			
MTBF	90,646Hours (MIL-HDBK-217)			
Warranty	5 years			
Certification				
EMC	CE (EN55035, EN55032)			
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE			
Railway Traffic	EN50155, and EN50121-4			

EN50155 Managed 10G PoE Switch

5

Fire protection of railway vehicles	EN 45545-2
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B
	EN61000-4-3 (RS) Level 3, Criteria A
	EN61000-4-4 (Burst) Level 3, Criteria A
	EN61000-4-5 (Surge) Level 3, Criteria B
	EN61000-4-6 (CS) Level 3, Criteria A
	EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Shock	IEC-61373
Freefall	IEC 60068-2-32
Vibration	IEC-61373

Software Specifications

Topology

VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN ID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries Private VLAN for port isolation GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration) Voice VLAN
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 16 trunk group Dynamic (IEEE 802.3ad LACP), up to 16 trunk group Support IEEE802.1AX passive and active mode
Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
Multiple μ-Ring	Up to 5 instances that each supports μ -Ring, μ -Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <50ms The maximum number of device is allowed 250 nodes in a Ring.
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
ITU-T G.8031 / Y.1342 EPS (Ethernet Protection Switching)	Supported
QoS Feature	
Class of Service	IEEE802.1p 8 active priorities queues per port
Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL (QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI, Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	100~1,000,000 when the "Unit" is "kbps", and 1~1,000 when the "Unit" is "Mbps"
Bandwidth Control for Egress	100~1,000,000 when the "Unit" is "kbps", and 1~1,000 when the "Unit" is "Mbps" Rate Unit : bit Per queue / Port shaper
DiffServ (RF 2474) Remarking	
Storm Control	For Unicast, Broadcast and Multicast

EN50155 Managed 10G PoE Switch

5

IP Multicasting Feature

IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2
	Port Filtering Profile, Throttling
	Fast Leave
	Maximum Multicast Group : up to 1022 entries
	Query / Static Router Port

Security Features

IEEE 802.1X	Port-Based, MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2: Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
RADIUS	Authentication & Accounting
TACACS+	Authentication, Authorization, Accounting
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name Password Authentication	Local Authentication Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	Web, Telnet / SSH, CLI, RS-232 console

Management Features

CLI	Cisco® like CLI
Web UI	Supported
Telnet	Server
SNMP	V1, V2c, V3
sFlow	Supported
Modbus/TCP	Supports for management and monitoring
SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure
SFTP & FTP client	Supports for upload/download configuration
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB II	RFC 1213
UPnP	Supported
BOOTP	Supported
DHCP	Server, Client, Relay, Relay option 82, Snooping
RARP	Supported
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164) (Support 4 server), store in non-volatile Flash ROM, 10240 recore
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
NTP, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED

IPv6 Features

IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported


EN50155 Managed 10G PoE Switch

IPv6 ACL Number of rules: up to 256 entries
 for L2 / L3 / L4
 L2: Mac address SA/DA/VLAN
 L3: IP address SIP, Subnet (32bit)
 L4: TCP/UDP

Others Features

Advanced PoE Management PoE PD Failure Auto Checking, and Auto reset when PD fail
 PoE Scheduling (On/Off schedule weekly)
 PoE Configuration
 PoE Enable/Disable
 Power limit by classification
 Power limit by management
 Power feeding priority
 Total PoE Power budget limitation (maximum 80W)

Dimensions

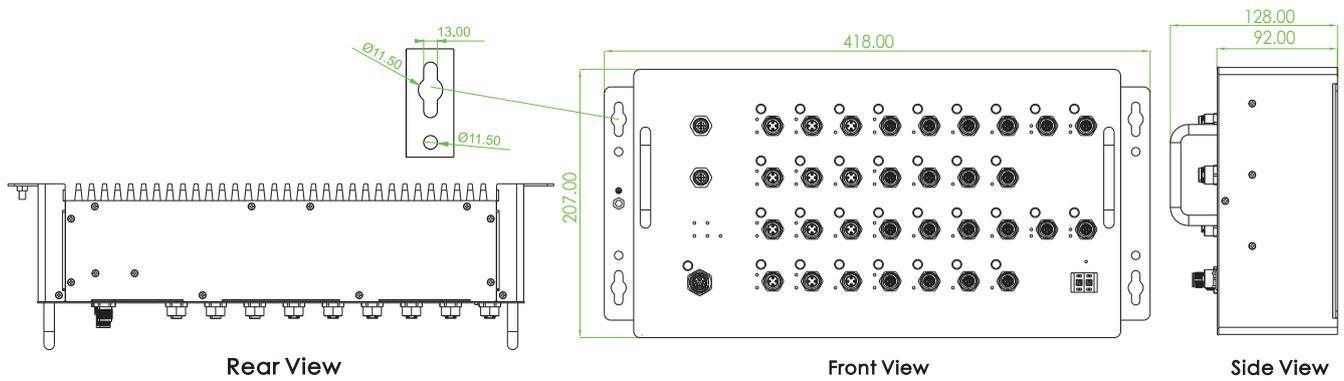

Ordering Information

Model Name	Managed	Total Port	FE	GbE	10G		PoE	
			D-code M12	X-code M12 UTP	X-code M12 UTP	10G X-code M12 Bypass	IEEE802.3 af/at	PoE Total Power Budget
ITP-12164XTM-12PH	V	32	12	16	4	4	12	80W

Redundant Dual Input Power	Certification					
24/48/72/96/110VDC (16.8~137.5VDC)	EN45545-2	EN50155	EN50121-4	EN61000-6-2 EN61000-6-4	CE, FCC	IEC61373
V	V	V	V	V	V	V