

ITP-802GSM-8PH24

IP67, 8x 10/100Base M12 + 2x 100/1000Base SFP with 8x PoE 180W, 24/48VDC

- ▲ EN50155, EN50121-4, EN45545-2, EN61000-6-2, EN61000-6-4,
CE and FCC certified
- ▲ 24/48VDC redundant dual input power
- ▲ Regulated PoE output voltage
- ▲ Auto checking and auto reset when PoE PD fail



The EN50155 certified managed PoE switch ITP-802GSM-8PH24, that provides 8 10/100 M12 D-code Ethernet ports and 2 100/1000 SFP slots. Supports a variety of PoE operation functions, including automatic detection of PoE device power, automatic reset, PoE scheduling, etc. Designed for heavy industrial, vehicle and rolling stock applications, utilizing M12 connectors to ensure secure connections and reliable operation, withstand environmental disturbances such as vibration and shock. with IP67 rating to protect against dust and water submersion, 24VDC power input design compatible with vehicle battery power supply, realizes PoE function through voltage boosting. EN50155 certification covers operating temperature, mains input voltage, surge, ESD, vibration and shock, making the switch suitable for vehicle, rolling stock applications.

Features

- M12 and M23 connector against vibration and shock
- 24/48VDC redundant dual input power, and built-in power booster design upto 50VDC for PoE output
- Regulated PoE output voltage (50VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meters
- Advanced PoE Management, management, PoE PD failure, auto checking and auto reset, PoE configuration for power planning, weekly scheduling
- Cable diagnostics, identifies opens/shorts distance
- Provides up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses.
(Please see CTC Union's μ-Ring white paper for more details)
- Supports TTDP for train application
- Supports IEEE 1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- Supports EMS Management

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	ITU-T G.8031 / Y.1342	EPS (Ethernet Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)

EN50155 Managed PoE Switch

Standard	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication																		
	IEEE 802.3ac	Max frame size extended to 1522Bytes																		
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)																		
	IEEE 802.3x	Flow control for Full Duplex																		
	IEEE 802.3af	PoE (Power over Ethernet)																		
	IEEE 802.3at	PoE+ (Power over Ethernet enhancements)																		
	IEEE 802.1ad	Stacked VLANs, Q-in-Q																		
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization																		
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)																		
	IEEE 802.3az	EEE (Energy Efficient Ethernet)																		
VLAN ID	4094 IEEE802.1Q VLAN VID																			
Switch Architecture	Back-plane (Switching Fabric): 5.6Gbps (Full wire-speed)																			
Data Processing	Store and Forward																			
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode																			
PoE Port	8x M12 (4-Pin D-code Female) ports support IEEE 802.3af / IEEE 802.3at End-Span, Alternative A mode.																			
Network Connector	8x M12 (4-Pin, Female,D-Code) 10/100Base-TX UTP + 2x 100/1000Base-X SFP UTP port provides Auto negotiation speed, Auto MDI/MDI-X, Full/Half duplex function 2x Water-proof cable connector 2x 100/1000Base-X SFP slot, support DDMI																			
Console	RS-232 (5-pin A-Code M12 male)																			
Network Cable	UTP/STP Cat. 5e cable or above EIA/TIA-568 100-ohm (100meter)																			
Protocols	CSMA/CD																			
Reverse Polarity Protection	Supported																			
Overload Current Protection	Supported																			
CPU Watch Dog	Supported																			
LED	System: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Amber) UTP: 10/100 Link/Active (Green) SFP Slot: Link/Active (Green) PoE: ON (Green)																			
Jumbo Frame	9.6KB																			
MAC Address Table	8K																			
Memory Buffer	512K Bytes for packet buffer																			
Device Memory	16M Bytes Flash ROM, 128M Bytes RAM																			
PoE Standard	IEEE 802.3af, IEEE 802.3at																			
PoE Power Output	Maximum PoE output power budget 180W (30W/per port) Regulated PoE output voltage at 50VDC																			
Power Supply	Provides 1x M23 (5-Pin, male) for redundant dual DC 24/48V (20~57VDC) input power Built-in very high efficiency booster(94~97%) to rise up 50VDC for PoE output Regulated PoE output voltage (50VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100 meter																			
Power Consumption	<table border="1"> <thead> <tr> <th>Input Voltage</th> <th>Total Power Consumption</th> <th>Device Power Consumption</th> <th>PoE Budget</th> <th>Boost Efficiency</th> </tr> </thead> <tbody> <tr> <td>24 VDC</td> <td>196.4W</td> <td>8.1W</td> <td>180W</td> <td>95.50%</td> </tr> <tr> <td>48 VDC</td> <td>197.8W</td> <td>9.6W</td> <td>180W</td> <td>95.60%</td> </tr> </tbody> </table>					Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency	24 VDC	196.4W	8.1W	180W	95.50%	48 VDC	197.8W	9.6W	180W	95.60%
Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency																
24 VDC	196.4W	8.1W	180W	95.50%																
48 VDC	197.8W	9.6W	180W	95.60%																
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay																			
Alarm Relay Contact	5-pin A-code M12 male, Relay outputs with current carrying capacity of 1 A @24VDC																			
Operating Temperature	-40 ~ 75°C																			
Operating Humidity	5% to 95% (Non-condensing)																			
Storage Temperature	-40 ~ 85°C																			
Housing	Rugged Metal, Fanless , IP67 grade housing for against water, dust, and oil																			
Dimensions	69 x 240 x 168mm (D x W x H)																			
Weight	2.170kg																			
Installation Mounting	Wall mounting, or DIN Rail mounting (Optional)																			
MTBF	371,961 Hours (MIL-HDBK-217)																			
Warranty	5 years																			

Certification

EMC	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50155, EN50121-4
Fire protection of railway vehicles	EN45545-2
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Shock	IEC-61373
Freefall	IEC 60068-2-32
Vibration	IEC-61373

Software Specifications

Topology

VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN(Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries Private VLAN for port isolation GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration) Voice VLAN
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
Multiple μ -Ring	Up to 5 instances that each supports u-Ring, u-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250.
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
ITU-T G.8031 / Y.1342 EPS (Ethernet Protection Switching)	Supported

QoS Features

Class of Service	IEEE802.1p 8 active priorities queues per port
Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number

Bandwidth Control for Ingress	100~1,000,000 when the "Unit" is "kbps" and 1~1,000 when the "Unit" is "Mbps"
Bandwidth Control for Egress	100~1,000,000 when the "Unit" is "kbps" and 1~1,000 when the "Unit" is "Mbps" Rate Unit : bit Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast

IP Multicasting Features

IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile, Throttling Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
---------------------	--

Security Features

IEEE 802.1X	Port-Based, MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2: Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
RADIUS	Authentication & Accounting
TACACS+	Authentication
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name Password Authentication	Local Authentication Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	Web, Telnet / SSH, CLI RS-232 console

Management Features

CLI	Cisco® like CLI
Web UI	Supported
Telnet	Server
SNMP	V1, V2c, V3
sFlow	Supported
Modbus/TCP	Supports for management and monitoring
SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure
FTP client	Supports for upload/download configuration
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB II	RFC 1213
UPnP	Supported
BOOTP	Supported
DHCP	Server, Client, Relay, Relay option 82 , Snooping
RARP	Supported
TTDP	Supported (Train Topology Discovery Protocol)
IP Source Guard	Supported
Port Mirroring	Supported Syslog server (RFC3164)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Supports 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master and Slave
NTP, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED


IPv6 Features

IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2: Mac address SA/DA/VLAN L3: IP address SIP, Subnet (32bit) L4: TCP/UDP

Others Features

Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management :Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable OK or broken point distance
Advanced PoE Management	PoE PD Failure Auto Checking, and Auto reset when PD fail PoE Scheduling (On/Off schedule weekly) PoE Configuration PoE Enable/Disable Power limit by classification Power limit by management Total PoE Power budge (maximum 180W) limitation Power feeding priority

Dimensions

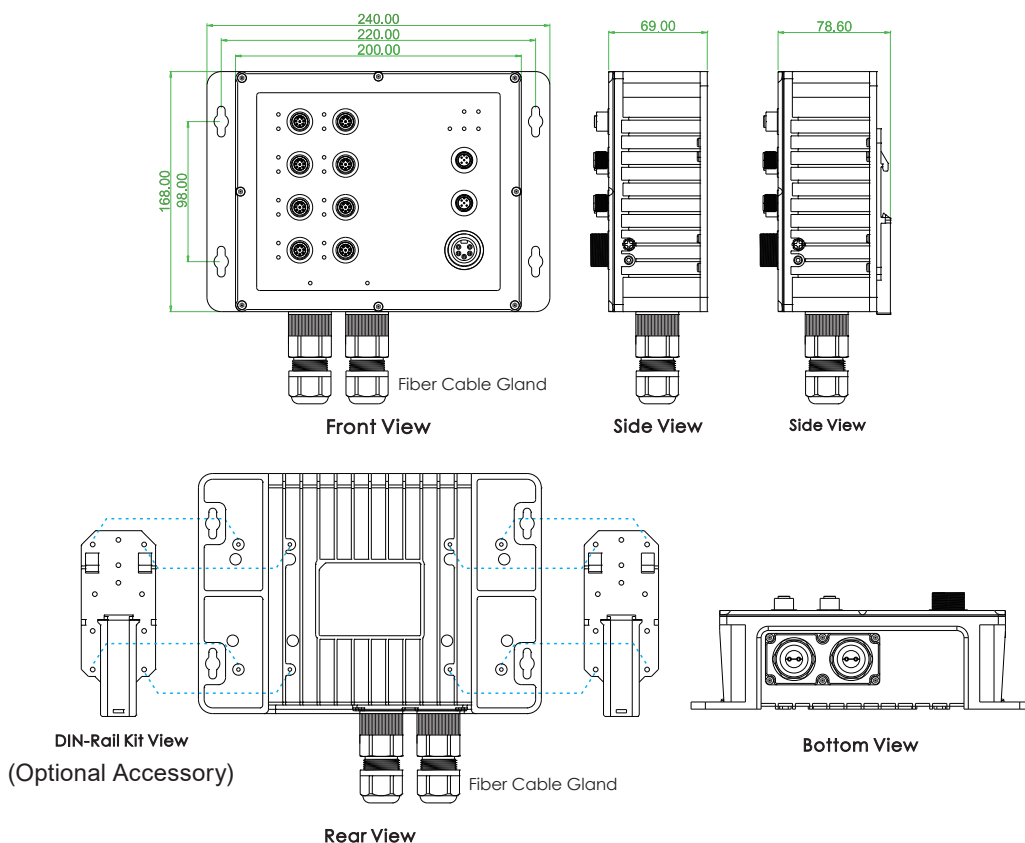

Ordering Information

Model Name	Managed	IP67	Total Port	UTP Port M12	UTP or SFP	PoE	PoE Total Power Budget	Power Input	Certification				Operating Temperature
				10/100 Base-TX	100/1000 Base-X	IEEE 802.3at		Redundant	EN50155 EN50121-4	EN45545-2		CE FCC	
ITP-802GSM-8PHE24	V	V	10	8	2 SFP	8	180W	24/48VDC	V	V	V	V	-40~75°C

Optional Accessories

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with all CTC Union industrial grade Ethernet switches for guaranteed compatibility and performance. Best performance can be guaranteed, even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheets for more items and detailed information.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

Optional Cable/Connector & Din-Rail Kit

P/N: CAB-M12AM8-RJ45

M12 A-code Male (8-Pin) to RJ-45, AWG 24 ,IP67, 1 meter



For GbE UTP (A-code model)

P/N: CAB-M12DM4-RJ45

M12 D-code Male (4-Pin) to RJ-45, AWG 24 ,IP67, 1 meter



For FE UTP

P/N: CAB-M12AF5-OPEN

M12 A-code Female (5-Pin) to open wire , AWG 22 , IP67, 1 meter



For Alarm

P/N: CAB-M23F5-OPEN

M23 Female (5-Pin) to open wire, (AWG 16) , IP67, 1 meter



For Power

P/N: M12A-M8

M12 A-code Male (8-Pin) connector, IP67



For GbE UTP (A-code model)

P/N: M12A-M8

M12 A-code Male (8-Pin) connector, IP67



For GbE UTP (A-code model)

P/N: M12D-M4

M12 D-code Male (4-Pin) connector, IP67



For FE UTP

P/N: M12A-F5

M12 A-code Female (5-Pin) connector, IP67



For Alarm

P/N: IND-DNK04

Din Rail Kit



(130 X52mm / 4 Screws) (2pcs/set)