

ITP-802GTM-8PH24

IP67, 8x FE M12 + 2x GbE M12 with 8x PoE 180W, 24/48VDC

- ◆ EN50155, EN50121-4, EN45545-2, EN61000-6-2, EN61000-6-4, CE and FCC Certified
- ◆ 24/48VDC Redundant Dual Power Input
- ◆ Regulated PoE Output Voltage
- ◆ Auto Checking and Auto Reset when PoE PD Fail
- ◆ Build-in 2 Bypass GbE UTP Ports



The EN50155 certified managed PoE switch ITP-802GTM-8PH24, that provides 8x 10/100Base-TX M12 D-code and 2x Gigabit M12 A-code Ethernet ports. Supports a variety of PoE operation functions, including automatic detection of PoE device power, automatic reset, PoE scheduling, etc. Designed for heavy industrial, vehicle and rolling stock applications, utilizing M12 connectors to ensure secure connections and reliable operation, withstand environmental disturbances such as vibration and shock. with IP67 rating to protect against dust and water submersion, 24VDC power input design compatible with vehicle battery power supply, realizes PoE function through voltage boosting. EN50155 certification covers operating temperature, mains input voltage, surge, ESD, vibration and shock, making the switch suitable for vehicle, rolling stock applications.

Features

- M12 and M23 connector against vibration and shock
- 24/48VDC redundant dual input power, and built-in power booster design up to 50VDC for PoE output
- Regulated PoE output voltage (50VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meters
- Advanced PoE Management, management, PoE PD failure, auto checking and auto reset, PoE configuration for power planning, weekly scheduling
- Cable diagnostics, identifies opens/shorts distance
- Provides up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses.
(Please see CTC Union's μ-Ring white paper for more details)
- Supports TTDP for train application
- Supports IEEE 1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- Supports EMS Management

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.1D	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	ITU-T G.8031 / Y.1342	EPS (Ethernet Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE802.3ac	Max frame size extended to 1522Bytes
	IEEE 802.3ad	Link aggregation for parallel links with LACP (Link Aggregation Control Protocol)
	IEEE 802.3x	Flow control for Full Duplex

EN50155 Managed PoE Switch



Standard	IEEE 802.3af	PoE (Power over Ethernet)			
	IEEE 802.3at	PoE+ (Power over Ethernet ehancements)			
	IEEE 802.1ad	Stacked VLANs, Q-in-Q			
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization			
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)			
	IEEE 802.3az	EEE (Energy Efficient Ethernet)			
VLAN ID	4094 IEEE802.1Q VLAN ID				
Switch Architecture	Back-plane (Switching Fabric): 5.6Gbps (Full wire-speed)				
Data Processing	Store and Forward				
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode				
PoE Port	8x M12 (4-Pin D-code Female) ports support IEEE 802.3af / IEEE 802.3at End-Span, Alternative A mode.				
Network Connector	8x M12 (4-Pin, Female,D-Code) 10/100Base-TX UTP + 2x M12 (8-Pin, female,A-code) 10/100/1000Base-T UTP				
	UTP port provides Auto negotiation speed, Auto MDI/MDI-X, Full/Half duplex function				
	Build-in 2x bypass GbE UTP ports				
Console	RS-232 (5-pin A-Code M12 male)				
Network Cable	UTP/STP Cat. 5e cable or above				
	EIA/TIA-568 100-ohm (100meter)				
Protocols	CSMA/CD				
Reverse Polarity Protection	Supported				
Overload Current Protection	Supported				
CPU Watch Dog	Supported				
LED	System: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Amber)				
	UTP: 10/100 Link/Active (Green), 1000 Link/Active (Amber)				
	PoE: ON (Green)				
Jumbo Frame	9.6KB				
MAC Address Table	8K				
Memory Buffer	512K Bytes for packet buffer				
Device Memory	16M Bytes Flash ROM, 128M Bytes RAM				
PoE Standard	IEEE 802.3af, IEEE 802.3at				
PoE Power Output	Maximum PoE output power budget 180W (30W/port) Regulated PoE output voltage at 50VDC				
Power Supply	Provides 1x M23 (5-Pin, male) for redundant dual DC 24/48V (20~57VDC) input power				
	Built-in very high efficiency booster (94~97%) to rise up 50VDC for PoE output				
	Regulated PoE output voltage (50VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100 meter				
Power Consumption	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency
	24 VDC	198.3W	8.9W	180W	95.00%
	48 VDC	198.8W	10.1W	180W	95.30%
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay				
Alarm Relay Contact	5-pin A-code M12 male, Relay outputs with current carrying capacity of 1A @24VDC				
Operating Temperature	-40 ~ 75°C				
Operating Humidity	5% to 95% (Non-condensing)				
Storage Temperature	-40 ~ 85°C				
Housing	Rugged Metal, Fanless , IP67 grade housing for against water, dust, and oil				
Dimensions	69 x 240 x 168mm (D x W x H)				
Weight	2.15kg				
Installation Mounting	Wall mounting or DIN Rail mounting (Optional)				
MTBF	362,429 Hours (MIL-HDBK-217)				
Warranty	5 years				
Certification					
EMC	CE				
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE				
Railway Traffic	EN50155, EN50121-4				
Fire protection of railway vehicles	EN45545-2				



Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B
	EN61000-4-3 (RS) Level 3, Criteria A
	EN61000-4-4 (Burst) Level 3, Criteria A
	EN61000-4-5 (Surge) Level 3, Criteria B
	EN61000-4-6 (CS) Level 3, Criteria A
	EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Shock	IEC-61373
Freefall	IEC 60068-2-32
Vibration	IEC-61373

Software Specifications

Topology

VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN ID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN(Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries Private VLAN for port isolation GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration) Voice VLAN
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
Multiple μ-Ring	Up to 5 instances that each supports u-Ring, u-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <10ms The maximum number of device is allowed 250 nodes in a Ring.
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
ITU-T G.8031 / Y.1342 EPS (Ethernet Protection Switching)	Supported

QoS Features

Class of Service	IEEE802.1p 8 active priorities queues per port
Traffic Classification QoS	IEEE802.1p based CoS
	IP Precedence based CoS
	IP DSCP based CoS
	QCL (QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI, Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	100~1,000,000 when the "Unit" is "kbps" and 1~1,000 when the "Unit" is "Mbps"
Bandwidth Control for Egress	100~1,000,000 when the "Unit" is "kbps" and 1~1,000 when the "Unit" is "Mbps"
	Rate Unit : bit Per queue / Port shaper
DiffServ (RF 2474) Remarking	
Storm Control	For Unicast, Broadcast and Multicast

IP Multicasting Features

IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2
	Port Filtering Profile, Throttling
	Fast Leave
	Maximum Multicast Group : up to 1022 entries
	Query / Static Router Port

Security Features

IEEE 802.1X	Port-Based, MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2: Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
RADIUS	Authentication & Accounting
TACACS+	Authentication
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name Password Authentication	Local Authentication Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	Web, Telnet / SSH, CLI RS-232 console

Management Features

CLI	Cisco® like CLI
Web UI	Supported
Telnet	Server
SNMP	V1, V2c, V3
sFlow	Supported
Modbus/TCP	Supports for management and monitoring
SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure
FTP client	Supports for upload/download configuration
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB II	RFC 1213
UPnP	Supported
BOOTP	Supported
DHCP	Server, Client, Relay, Relay option 82, Snooping
RARP	Supported
TTDP	Supported (Train Topology Discovery Protocol)

IP Source Guard	Supported
Port Mirroring	Supported Syslog server (RFC3164)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Supports 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master and Slave
NTP, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED

IPv6 Features

IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client

EN50155 Managed PoE Switch

IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2: Mac address SA/DA/VLAN L3: IP address SIP, Subnet (32bit) L4: TCP/UDP


Others Features

Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management: Adjustment LEDs intensity
-----------------------	---

Cable Diagnostic	Measuring UTP cable OK or broken point distance
-------------------------	---

Advanced PoE Management	PoE PD Failure Auto Checking, and Auto reset when PD fail PoE Scheduling (On/Off schedule weekly) PoE Configuration PoE Enable/Disable Power limit by classification Power limit by management Total PoE Power budge (maximum 180W) limitation Power feeding priority
--------------------------------	---

Dimensions

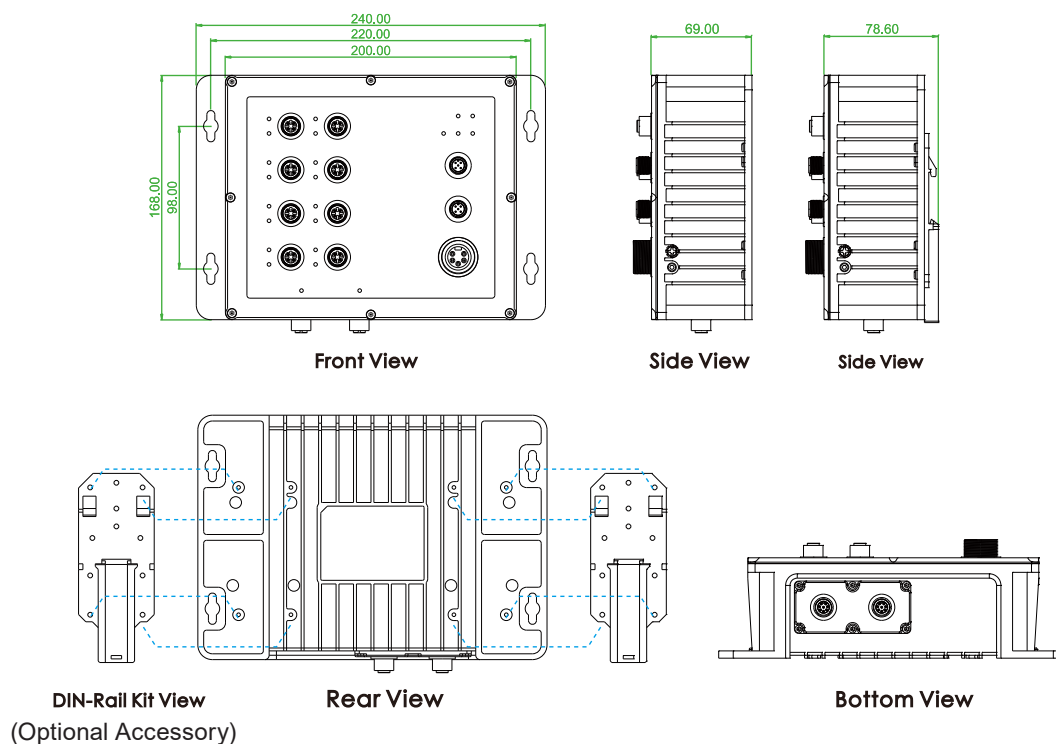

Ordering Information

Model Name	Managed	IP67	Total Port	UTP M12		PoE	PoE Total Power Budget	Power Input	Certification				Operating Temperature
				10/100 Base-TX	100/1000 Base-X				EN50155 EN50121-4	EN45545-2	EN61000-6-2 EN61000-6-4	CE FCC	
ITP-802GTM-8PHE24	V	V	10	8	2 (A-code)	8	180W	24/48VDC	V	V	V	V	-40~75°C

5

Optional Accessories

■ Optional Cable/Connector & Din-Rail Kit

P/N: CAB-M12AM8-RJ45

M12 A-code Male (8-Pin) to RJ-45, AWG 24, IP67, 1 meter



For GbE UTP (A-code model)

P/N: CAB-M12DM4-RJ45

M12 D-code Male (4-Pin) to RJ-45, AWG 24, IP67, 1 meter



For FE UTP

P/N: CAB-M12AF5-OPEN

M12 A-code Female (5-Pin) to open wire, AWG 22, IP67, 1 meter



For Alarm

P/N: CAB-M23F5-OPEN

M23 Female (5-Pin) to open wire, (AWG 16), IP67, 1 meter



For Power

P/N: M12A-M8

M12 A-code Male (8-Pin) connector, IP67



For GbE UTP (A-code model)

P/N: M12A-M8

M12 A-code Male (8-Pin) connector, IP67



For GbE UTP (A-code model)

P/N: M12D-M4

M12 D-code Male (4-Pin) connector, IP67



For FE UTP

P/N: M12A-F5

M12 A-code Female (5-Pin) connector, IP67



For Alarm

P/N: IND-DNK04

Din Rail Kit



(130 X52mm / 4 Screws) (2pcs/set)