

ITP-G802SM

IP67, 8x GbE + 2x 100/1000Base-X SFP

- » EN50155, EN50121-4, EN45545-2, EN61000-6-2, EN61000-6-4, CE and FCC Certified
- » 12/24/48VDC or 110/220VDC Redundant Dual Power Input
- » Supports TTDP for Train Application
- » Cable Diagnostics, Identifies Opens/Shorts Distance



The ITP series models are managed, industrial grade, L2 GbE switches that provide 8x GbE UTP plus 2x GbE SFP. Housed in rugged wall mountable enclosures, these switches are designed for the harshest environments. All ITP series switches use M12 connectors to ensure water-tight, robust connections and guarantee reliable connections against vibration and shock. These models are also compliant with EN50155, covering power input voltage, surge, EFT, ESD, vibration and shock, making these switches suitable for industrial applications, such as vehicle, rolling stock, or vessel. With an IP67 rating, to protect against dust and water submersion, they are particularly useful in environments with extreme temperature, high humidity, oil, dust and in outdoor environments requiring water-proof applications, such as IP surveillance or city security.

Features

- M12 and M23 connector against vibration and shock
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Protection Ring (ERPS) for redundant cabling
- Provides up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses.
(Please see CTC Union's μ-Ring white paper for more details)
- Supports IEEE 1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- Supports EMS Management

Specifications

Standard	Specification
IEEE 802.3	10Base-T 10Mbit/s Ethernet
IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
IEEE 802.1d	STP (Spanning Tree Protocol)
IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
ITU-T G.8031 / Y.1342	EPS (Ethernet Protection Switching)
IEEE 802.1Q	Virtual LANs (VLAN)
IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
IEEE 802.3ac	Max frame size extended to 1522Bytes
IEEE 802.3ad	Link aggregation for parallel links with LACP (Link Aggregation Control Protocol)
IEEE 802.3x	Flow control for Full Duplex
IEEE 802.1ad	Stacked VLANs, Q-in-Q
IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)
IEEE 802.3az	EEE (Energy Efficient Ethernet)

EN50155 Managed Switch

5

VLAN ID	4094 IEEE 802.1Q VLAN ID									
Switch Architecture	Back-plane (Switching Fabric): 20Gbps (Full wire-speed)									
Data Processing	Store and Forward									
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode									
Network Connector	8x M12(8-Pin, Female, A-Code) 10/100/1000Base-T + 2x 100/1000Base-X SFP UTP port provides Auto negotiation speed, Auto MDI/MDI-X, Full/Half duplex function 2x Water-proof cable connector 2x 100/1000Base-X SFP slot, support DDMI									
Console	RS-232 (5-pin A-Code M12 male)									
Network Cable	UTP/STP Cat. 5e cable or above EIA/TIA-568 100-ohm (100meter)									
Protocols	CSMA/CD									
Reverse Polarity Protection	Supported									
Overload Current Protection	Supported									
CPU Watch Dog	Supported									
LED	System: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Amber) UTP: 10/100 Link/Active (Green), 1000 Link/Active (Amber) SFP Slot: Link/Active (Green)									
Jumbo Frame	9.6KB									
MAC Address Table	8K									
Memory Buffer	512K Bytes for packet buffer									
Device Memory	16M Bytes Flash ROM, 128M Bytes RAM									
Power Supply	Provides 1x M23 (5-Pin, male) for redundant dual input, optional Low (L) Low voltage (L) : 12/24/48V (8.4~60VDC)									
Power Consumption	<table border="1"> <thead> <tr> <th>Input Voltage</th> <th>ITP-G802SM-LL</th> </tr> </thead> <tbody> <tr> <td>12VDC</td> <td>8.5W</td> </tr> <tr> <td>24VDC</td> <td>9.2W</td> </tr> <tr> <td>48VDC</td> <td>11W</td> </tr> </tbody> </table>		Input Voltage	ITP-G802SM-LL	12VDC	8.5W	24VDC	9.2W	48VDC	11W
Input Voltage	ITP-G802SM-LL									
12VDC	8.5W									
24VDC	9.2W									
48VDC	11W									
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay									
Alarm Relay Contact	5-pin A-code M12 male, Relay outputs with current carrying capacity of 1A @24VDC									
Operating Temperature	-40 ~ 75°C									
Operating Humidity	5% to 95% (Non-condensing)									
Storage Temperature	-40 ~ 85°C									
Housing	Rugged Metal, Fanless, IP67 grade housing for against water, dust, and oil									
Dimensions	69 x 240 x 168mm (D x W x H)									
Weight	2.645kg									
Installation Mounting	Wall mounting or DIN Rail mounting (Optional)									
MTBF	443,868 Hours (MIL-HDBK-217)									
Warranty	5 years									
Certification										
EMC	CE									
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE									
Railway Traffic	EN50155, EN50121-4									
Fire protection of railway vehicles	EN45545-2									
Immunity for Heavy Industrial Environment	EN61000-6-2									
Emission for Heavy Industrial Environment	EN61000-6-4									
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A									

EN50155 Managed Switch

5

Shock	IEC-61373
Freefall	IEC 60068-2-32
Vibration	IEC-61373

Software Specifications

Topology

VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN ID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries Private VLAN for port isolation GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration) Voice VLAN
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
Multiple u-Ring	Up to 5 instances that each supports u-Ring, u-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <10ms The maximum number of device is allowed 250 nodes in a Ring.
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
ITU-T G.8031 / Y.1342 EPS (Ethernet Protection Switching)	Supported

QoS Feature

Class of Service	IEEE802.1p 8 active priorities queues per port
Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL (QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI, Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	100~1,000,000 when the "Unit" is "kbps", and 1~1,000 when the "Unit" is "Mbps"
Bandwidth Control for Egress	100~1,000,000 when the "Unit" is "kbps", and 1~1,000 when the "Unit" is "Mbps" Rate Unit : bit Per queue / Port shaper
DiffServ (RF 2474) Remarking	
Storm Control	For Unicast, Broadcast and Multicast

IP Multicasting Feature

IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile, Throttling Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
----------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Security Features

IEEE 802.1X	Port-Based, MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2: Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP

EN50155 Managed Switch


5

RADIUS	Authentication & Accounting
TACACS+	Authentication
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name Password Authentication	Local Authentication
	Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	Web, Telnet / SSH, CLI RS-232 console
Management Features	
CLI	Cisco® like CLI
Web UI	Supported
Telnet	Server
SNMP	TFTP, HTTP
sFlow	Supported
Modbus/TCP	Supports for management and monitoring
SW & Configuration Upgrade	TFTP, HTTP
	Redundant firmware in case of upgrade failure
FTP client	Supports for upload/download configuration
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB II	RFC 1213
UPnP	Supported
BOOTP	Supported
DHCP	Server, Client, Relay, Relay option 82, Snooping
RARP	Supported
TTDP	Supported (Train Topology Discovery Protocol)
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Supports 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master and Slave
NTP, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol
	LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries
	for L2 / L3 / L4
	L2: Mac address SA/DA/VLAN
	L3: IP address SIP, Subnet (32bit) L4: TCP/UDP
Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption
	Determine the cable length and lowering the power for ports with short cables
	Lower the power for a port when there is no link
	LED Power Management: Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable OK or broken point distance

EN50155 Managed Switch

5

Dimensions

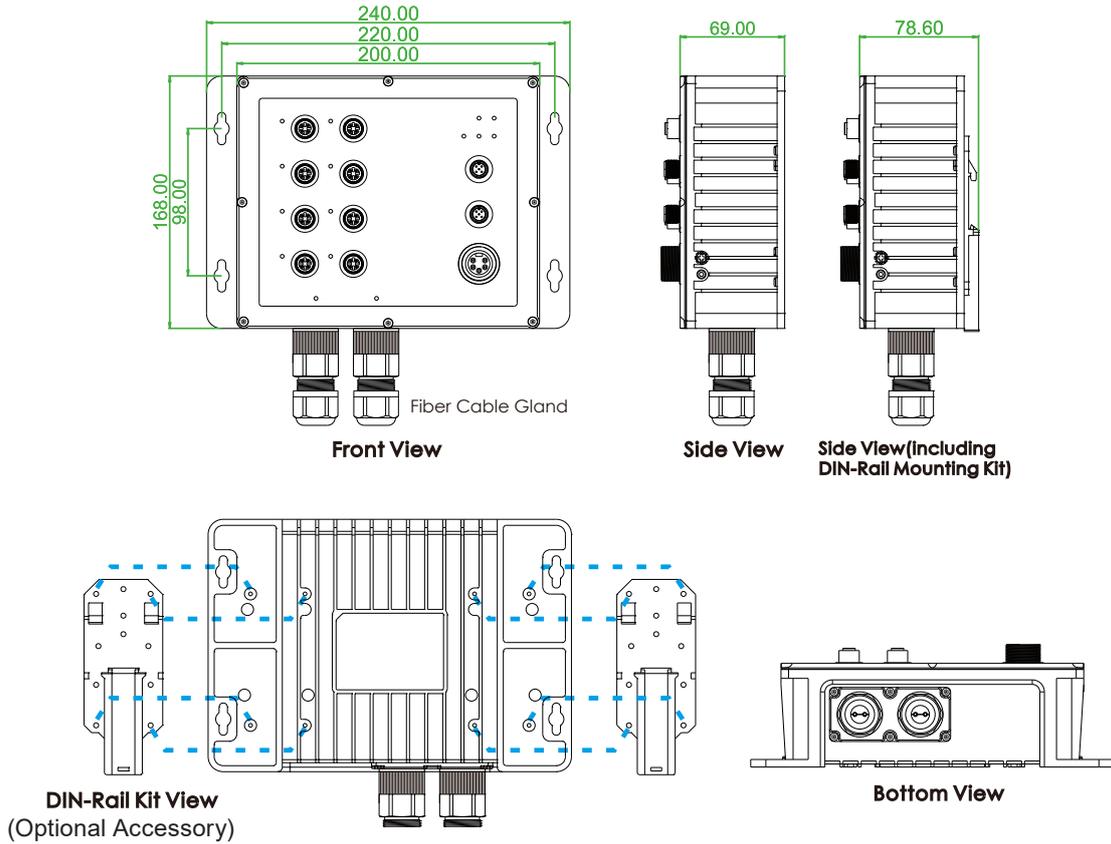

Ordering Information

Model Name	Managed	IP67	Total Port	UTP M12	SFP	Redundant Power Supply	Certification				Operating Temperature
				10/100/1000 Base-T(X)	100/1000 Base-X	Low Volt 12/24/48VDC (8.4~60VDC)	EN50155 EN50121-4	EN45545-2	EN61000-6-2 EN61000-6-4	CE FCC	
ITP-G802SM-ELL	V	V	10	8 (A-code)	2	2	V	V	V	V	-40~75°C

Optional Accessories

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with all CTC Union industrial grade Ethernet switches for guaranteed compatibility and performance. Best performance can be guaranteed, even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheets for more items and detailed information.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

EN50155 Managed Switch

5 ■ Optional Cable/Connector & Din-Rail Kit

P/N: CAB-M12AM8-RJ45

M12 A-code Male (8-Pin) to RJ-45, AWG 24, IP67, 1 meter



For GbE UTP (A-code model)

P/N: CAB-M12AF5-OPEN

M12 A-code Female (5-Pin) to open wire, AWG 22, IP67, 1 meter



For Alarm

P/N: CAB-M23F5-OPEN

M23 Female (5-Pin) to open wire, (AWG 16), IP67, 1 meter



For Power

P/N: M12A-M8

M12 A-code Male (8-Pin) connector, IP67



For GbE UTP (A-code model)

P/N: M12A-F5

M12 A-code Female (5-Pin) connector, IP67



For Alarm

P/N: IND-DNK04

Din Rail Kit



(130 X52mm / 4 Screws) (2pcs/set)