

# EN50155 Managed PoE Switch

5

## ITP-G802TM-8PH24

CTC<sup>®</sup>  
union

**IP67, 10x GbE M12 with 8x PoE 180W, 24/48VDC**

- » EN50155, EN50121-4, EN45545-2, EN61000-6-2, EN61000-6-4, CE and FCC Certified
- » 24/48VDC Redundant Dual Power Input
- » Regulated PoE Output Voltage
- » Auto Checking and Auto Reset when PoE PD Fail
- » Build-in 2 Bypass GbE UTP Port

CE FCC



The EN50155 certified managed PoE switch ITP-G802TM-8PH24, full Gigabit, that provides 10x Gigabit M12 A-code Ethernet ports. Supports a variety of PoE operation functions, including automatic detection of PoE device power, automatic reset, PoE scheduling, etc. Designed for heavy industrial, vehicle and rolling stock applications, utilizing M12 connectors to ensure secure connections and reliable operation, withstand environmental disturbances such as vibration and shock. with IP67 rating to protect against dust and water submersion, 24VDC power input design compatible with vehicle battery power supply, realizes PoE function through voltage boosting. EN50155 certification covers operating temperature, mains input voltage, surge, ESD, vibration and shock, making the switch suitable for vehicle, rolling stock applications.

### Features

- M12 and M23 connector against vibration and shock
- 24/48VDC redundant dual input power, and built-in power booster design up to 50VDC for PoE output
- Regulated PoE output voltage (50VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meters
- Cable diagnostics, identifies opens/shorts distance
- Provides up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses.  
(Please see CTC Union's μ-Ring white paper for more details)
- Supports TTDP for train application
- Supports IEEE 1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- Supports EMS Management

### Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol )
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	ITU-T G.8031 / Y.1342	EPS (Ethernet Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE 802.3ac	Max frame size extended to 1522Bytes
	IEEE 802.3ad	Link aggregation for parallel links with LACP (Link Aggregation Control Protocol)
	IEEE 802.3x	Flow control for Full Duplex

# EN50155 Managed PoE Switch

<b>Standard</b>	IEEE 802.3af	PoE (Power over Ethernet)			
	IEEE 802.3at	PoE+ (Power over Ethernet enhancements)			
	IEEE 802.1ad	Stacked VLANs, Q-in-Q			
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization			
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)			
	IEEE 802.3az	EEE (Energy Efficient Ethernet)			
<b>VLAN ID</b>	4094 IEEE802.1Q VLAN ID				
<b>Switch Architecture</b>	Back-plane (Switching Fabric): 20Gbps (Full wire-speed)				
<b>Data Processing</b>	Store and Forward				
<b>Flow Control</b>	IEEE 802.3x for full duplex mode Back pressure for half duplex mode				
<b>PoE RJ-45 Pin Assignment</b>	8x M12 (8-Pin A-code Female) ports support IEEE 802.3af / IEEE 802.3at End-Span, Alternative A mode.				
<b>Network Connector</b>	10x M12 (8-Pin, Female, A-Code) 10/100/1000Base-T UTP				
	UTP port provides Auto negotiation speed, Auto MDI/MDI-X, Full/Half duplex function				
	Build-in 2x bypass GbE UTP ports				
<b>Console</b>	RS-232 (5-pin A-Code M12 male )				
<b>Network Cable</b>	UTP/STP Cat. 5e cable or above				
	EIA/TIA-568 100-ohm (100meter)				
<b>Protocols</b>	CSMA/CD				
<b>Reverse Polarity Protection</b>	Supported				
<b>Overload Current Protection</b>	Supported				
<b>CPU Watch Dog</b>	Supported				
<b>LED</b>	System: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Amber)				
	UTP: 10/100 Link/Active (Green), 1000 Link/Active (Amber)				
	SFP Slot: Link/Active (Green)				
	PoE: ON (Green)				
<b>Jumbo Frame</b>	9.6KB				
<b>MAC Address Table</b>	8K				
<b>Memory Buffer</b>	512K Bytes for packet buffer				
<b>Device Memory</b>	16M Bytes Flash ROM, 128M Bytes RAM				
<b>PoE Standard</b>	IEEE802.3af, IEEE802.3at				
<b>PoE Power Output</b>	Maximum PoE output power budget 180W (30W/port) Regulated PoE output voltage at 50VDC				
<b>Power Supply</b>	Provides 1x M23 (5-Pin, male) for redundant dual DC 24/48V (20~57VDC) input power				
	Built-in very high efficiency booster(94~97%) to rise up 50VDC for PoE output				
	Regulated PoE output voltage (50VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100 meter				
<b>Power Consumption</b>	<b>Input Voltage</b>	<b>Total Power Consumption</b>	<b>Device Power Consumption</b>	<b>PoE Budget</b>	<b>Boost Efficiency</b>
	24 VDC	200.4W	11.7W	180W	95.6%
	48 VDC	200.2W	12.5W	180W	95.9%
<b>Warning Message</b>	System Syslog, SMTP/ e-mail event message, alarm relay				
<b>Alarm Relay Contact</b>	5-pin A-code M12 male, Relay outputs with current carrying capacity of 1A @24VDC				
<b>Operating Temperature</b>	-40 ~ 75°C				
<b>Operating Humidity</b>	5% to 95% (Non-condensing)				
<b>Storage Temperature</b>	-40 ~ 85°C				
<b>Housing</b>	Rugged Metal, Fanless, IP67 grade housing for against water, dust, and oil				
<b>Dimensions</b>	69 x 240 x 168mm (D x W x H)				
<b>Weight</b>	2.15kg				
<b>Installation Mounting</b>	Wall mounting or DIN Rail mounting (Optional)				
<b>MTBF</b>	362,429 Hours (MIL-HDBK-217)				
<b>Warranty</b>	5 years				
<b>Certification</b>					
<b>EMC</b>	CE				
<b>EMI (Electromagnetic Interference)</b>	FCC Part 15 Subpart B Class A, CE				
<b>Railway Traffic</b>	EN50155, EN50121-4				

# EN50155 Managed PoE Switch

5

<b>Fire protection of railway vehicles</b>	EN45545-2
<b>Immunity for Heavy Industrial Environment</b>	EN61000-6-2
<b>Emission for Heavy Industrial Environment</b>	EN61000-6-4
<b>EMS (Electromagnetic Susceptibility) Protection Level</b>	EN61000-4-2 (ESD) Level 3, Criteria B
	EN61000-4-3 (RS) Level 3, Criteria A
	EN61000-4-4 (Burst) Level 3, Criteria A
	EN61000-4-5 (Surge) Level 3, Criteria B
	EN61000-4-6 (CS) Level 3, Criteria A
	EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
<b>Shock</b>	IEC-61373
<b>Freefall</b>	IEC 60068-2-32
<b>Vibration</b>	IEC-61373

## Software Specifications

### Topology

<b>VLAN</b>	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN ID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries Private VLAN for port isolation GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration) Voice VLAN
<b>Link Aggregation (Port Trunk)</b>	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
<b>Spanning Tree</b>	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
<b>Multiple <math>\mu</math>-Ring</b>	Up to 5 instances that each supports u-Ring, u-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <10ms The maximum number of device is allowed 250 nodes in a Ring.
<b>Loop Protection</b>	Supported
<b>ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)</b>	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
<b>ITU-T G.8031 / Y.1342 EPS (Ethernet Protection Switching)</b>	Supported
<b>QoS Features</b>	
<b>Class of Service</b>	IEEE802.1p 8 active priorities queues per port
<b>Traffic Classification QoS</b>	IEEE802.1p based CoS
	IP Precedence based CoS
	IP DSCP based CoS
	QCL (QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI, Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
<b>Bandwidth Control for Ingress</b>	100~1,000,000 when the "Unit" is "kbps" and 1~1,000 when the "Unit" is "Mbps"
<b>Bandwidth Control for Egress</b>	100~1,000,000 when the "Unit" is "kbps" and 1~1,000 when the "Unit" is "Mbps" Per queue / Port shaper
<b>DiffServ (RF 2474) Remarking</b>	
<b>Storm Control</b>	For Unicast, Broadcast and Multicast

# EN50155 Managed PoE Switch

5

## IP Multicasting Features

<b>IGMP / MLD Snooping</b>	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2
	Port Filtering Profile, Throttling
	Fast Leave
	Maximum Multicast Group : up to 1022 entries
	Query / Static Router Port

## Security Features

<b>IEEE 802.1X</b>	Port-Based, MAC-Based
<b>ACL</b>	Number of rules : up to 256 entries for L2 / L3 / L4 L2: Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
<b>RADIUS</b>	Authentication & Accounting
<b>TACACS+</b>	Authentication
<b>HTTPS, HTTP</b>	Supported
<b>SSL / SSH v2</b>	Supported
<b>User Name Password Authentication</b>	Local Authentication Remote Authentication (via RADIUS / TACACS+)
<b>Management Interface Access Filtering</b>	Web, Telnet / SSH, CLI RS-232 console

## Management Features

<b>CLI</b>	Cisco® like CLI
<b>Web UI</b>	Supported
<b>Telnet</b>	Server
<b>SNMP</b>	V1, V2c, V3
<b>sFlow</b>	Supported
<b>Modbus/TCP</b>	Supports for management and monitoring
<b>SW &amp; Configuration Upgrade</b>	TFTP, HTTP Redundant firmware in case of upgrade failure
<b>FTP client</b>	Supports for upload/download configuration
<b>RMON</b>	RMON I (1, 2, 3, 9 group), RMON II
<b>MIB II</b>	RFC 1213
<b>UPnP</b>	Supported
<b>BOOTP</b>	Supported
<b>DHCP</b>	Server, Client, Relay, Relay option 82, Snooping
<b>RARP</b>	Supported
<b>TTDP</b>	Supported (Train Topology Discovery Protocol)
<b>IP Source Guard</b>	Supported
<b>Port Mirroring</b>	Supported Syslog server (RFC3164)
<b>Warning Message</b>	System syslog, e-mail, alarm relay
<b>DNS</b>	Client, Proxy
<b>IEEE1588 PTP V2</b>	Supports 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master and Slave
<b>NTP, SNTP</b>	Client
<b>LLDP (IEEE 802.1ab)</b>	Link Layer Discovery Protocol LLDP-MED


## IPv6 Features

<b>IPv6 Management</b>	Telnet Server/ICMP v6
<b>SNMP over IPv6</b>	Supported
<b>HTTP over IPv6</b>	Supported
<b>SSH over IPv6</b>	Supported
<b>IPv6 Telnet</b>	Supported
<b>IPv6 NTP, SNTP</b>	Client

# EN50155 Managed PoE Switch

<b>IPv6 TFTP</b>	Supported
<b>IPv6 QoS</b>	Supported
<b>IPv6 ACL</b>	Number of rules: up to 256 entries for L2 / L3 / L4 L2: Mac address SA/DA/VLAN L3: IP address SIP, Subnet (32bit) L4: TCP/UDP
<b>Others Features</b>	
<b>Green Ethernet</b>	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management: Adjustment LEDs intensity
<b>Cable Diagnostic</b>	Measuring UTP cable OK or broken point distance
<b>Advanced PoE Management</b>	PoE PD Failure Auto Checking, and Auto reset when PD fail PoE Scheduling ( On/Off schedule weekly) PoE Configuration PoE Enable/Disable Power limit by classification Power limit by management Total PoE Power budge (maximum 180W) limitation Power feeding priority

## Dimensions

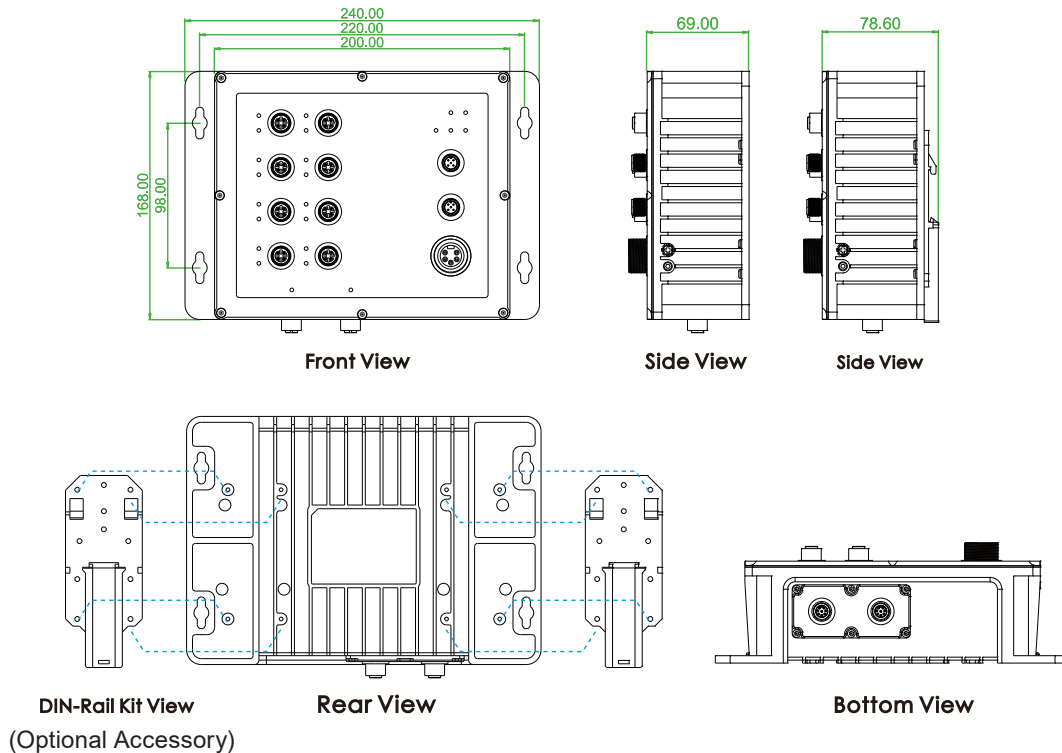

# EN50155 Managed PoE Switch

5

## Ordering Information

Model Name	Managed	IP67	Total Port	UTP M12	PoE	PoE Total Power Budget	Power Input	Certification				Operating Temperature
				10/100/1000 Base-T	IEEE 802.3at		Redundant	EN50155 EN50121-4	EN45545-2	EN61000-6-2 EN61000-6-4	CE FCC	
ITP-G802TM-8PHE24	V	V	10	10 (A-Code)	8	180W	24/48VDC	V	V	V	V	-40~75°C

## Optional Accessories

### Optional Cable/Connector & Din-Rail Kit

**P/N: CAB-M12AM8-RJ45**

M12 A-code Male (8-Pin) to RJ-45, AWG 24, IP67, 1 meter



For GbE UTP (A-code model)

**P/N: CAB-M12AF5-OPEN**

M12 A-code Female (5-Pin) to open wire, AWG 22, IP67, 1 meter



For Alarm

**P/N: CAB-M23F5-OPEN**

M23 Female (5-Pin) to open wire, (AWG 16), IP67, 1 meter



For Power

**P/N: M12A-M8**

M12 A-code Male (8-Pin) connector, IP67



For GbE UTP (A-code model)

**P/N: M12A-F5**

M12 A-code Female (5-Pin) connector, IP67



For Alarm

**P/N: IND-DNK04**

Din Rail Kit



(130 X52mm / 4 Screws) (2pcs/set)