# XMC-10GC



### 10G/5G/2.5G/1G/100M Copper to 10GBASE-R SFP+ Media Converter







The 10G Media Converter, XMC-10GC is equipped with one 10G/5G/2.5G/1G/100BASE-T auto-negotiation port and one 10GBASE-R SFP+ slot. This converter uses Cat.6a/Cat 7 twisted pair cable as copper transmission media with RJ-45 and 10G optical solution with SFP+ LC connector. The data stream can be converted bi-directionally from 10G Base-T to 10G Base-R and vice versa. With full duplex wire speed forwarding capability between these two media, the XMC-10GC brings you the best and simplest solution for the 10G Ethernet conversion between copper wire and fiber.


#### **Features**

- 1× 10G/5G/2.5G/1G/100BASE-T RJ45 interface with auto MDI/MDI-X function
- 1× 10GBASE-X SFP+ slot interface
- Supports auto-negotiation and 100Mbps and 1/2.5/5/10Gbps full duplex mode
- 16K jumbo frame size support
- Wall-mount design
- Loopback Test

- Link Fault Pass Through
- Supports USB console for set up and status checking
- Supports DWDM Tunable SFP+
- Supports Energy, Efficient, Ethernet (EEE)
- Supports Cable Diagnostic
- Supports Pattern Test
- Supports Local F/W upgrade

| <b>Specifications</b>    |  |
|--------------------------|--|
| Copper Interface         | 1 × 10G/5G/2.5G/1G/100BASE-T RJ45  |
| Fiber Optic Interface    | 1 × 10GBASE-R SFP+ slot  |
| LED                      | PWR, LFP, FX Link, FX Speed, LAN Link, LAN Speed                                     |
| Switch Processing Scheme | Store and Forward  |
| Enclosure                | Compact-sized metal case   |
| Installation             | Desktop, wall mountable  |
| Dimensions (W×D×H)       | $95 \times 23 \times 73.4$ mm  |
| Weight                   | 280g   |
| Power Requirements       | 12VDC / 1A   |
| Power Consumption        | 6W (max)   |
| Fabric                   | 20Gbps   |
| Jumbo Frame              | 16K  |
| Regulatory Compliance    | FCC Part 15 Class A, CE  |
| Operating Temperature    |  |
| Storage Environment      |  |
|                          | 5 ~ 95%, (non-condensing)  |
|                          | 5 ~ 95%, (non-condensing)  |
| Standards Compliance     | IEEE 802.3u 100BASE-TX, IEEE 802.3ab 1000BASE-T, IEEE 802.3bz 2.5G/5GBASE-T          |
|                          | IEEE 802.3an 10GBASE-T, IEEE 802.3ae 10Gbps Ethernet over Fiber                      |
| Network Cable            | 10GBase-T: 100meters over CAT6A and CAT7, 55meters over CAT6, Best Effort over CAT5e |

## **Application**

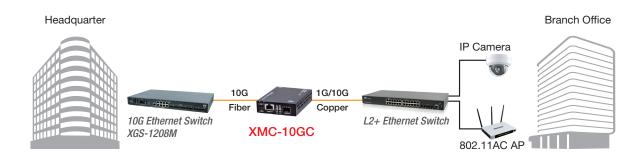

## **Ordering Information**

| Model Name | Description  |
|------------|--|
| XMC-10GC   | 10G/5G/2.5G/1G/100M RJ45 to 10GBASE-R SFP+ 10G Media Converter |

NOTE: The XMC-10GC may be placed in FMC-CH17 chassis with 6 pcs (max.)