



FRM220-10GC-TS

10G Base-T to 10G Base-R SFP+ Media Converter

The FRM220-10GC-TS is a copper to fiber 10G Ethernet media converter based on IEEE 802.3an and IEEE 802.3ae. With SNMP and Web-based management in the FRM220, the administrator can monitor, configure and control the activity of each card in the chassis. This converter uses Cat.6a/Cat 7 twisted pair cable as copper transmission media with RJ-45 and 10G optical solution with SFP+ LC connector. The data stream can be converted bi-directionally from 10G Base-T to 10G Base-R and vice versa. With full duplex wire speed forwarding capability between these two media, the FRM220-10GC-TS brings you the best and simplest solution for the 10G Ethernet conversion between copper wire and fiber.

Features

- Device Management via FRM220 Chassis with NMC
- Complies with IEEE 802.3an 10GBase-T and IEEE 802.3ae 10GBase-R
- Real-Time conversion between 10GBase-T and 10GBase-R
- Common used SFP+ fiber interface and RJ45 connector
- Full duplex wire speed forwarding
- Forwarding 18k bytes jumbo packet
- Loopback Test
- Link Fault Pass Through
- Fiber Fault Alert
- IEEE 802.1q VLAN pass through
- Supports manual Dip Switch for quick set up


Specifications

Optical Interface	Connector	SFP+ LC
	Data rate	10.3125Gbps
	Distance	300m, 10km, 40km, 80km
	Wavelength	1550nm, 1310nm, 850nm, WDM
Electrical Interface	Connector	RJ45
	Data rate	10Gbps
	Cable type	Cat.6a, 7
	Distance	95 meters (Cat.7)
Management	Console port	RS-232 via CH01M, DIP Switch with CH01
Standards	IEEE 802.3an, IEEE 802.3ae	

LEDs	SFP+, LR, Link/Act, LBK A/B, SYS
Power	12VDC
Power Consumption	< 12W
Dimensions	159.5 × 20.8 × 88mm (D × W × H)
Weight	130g
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)
Humidity	0 ~ 85% non-condensing
Certification	CE, FCC
MTBF	57,000 hrs

Application

10G Media Conversion application

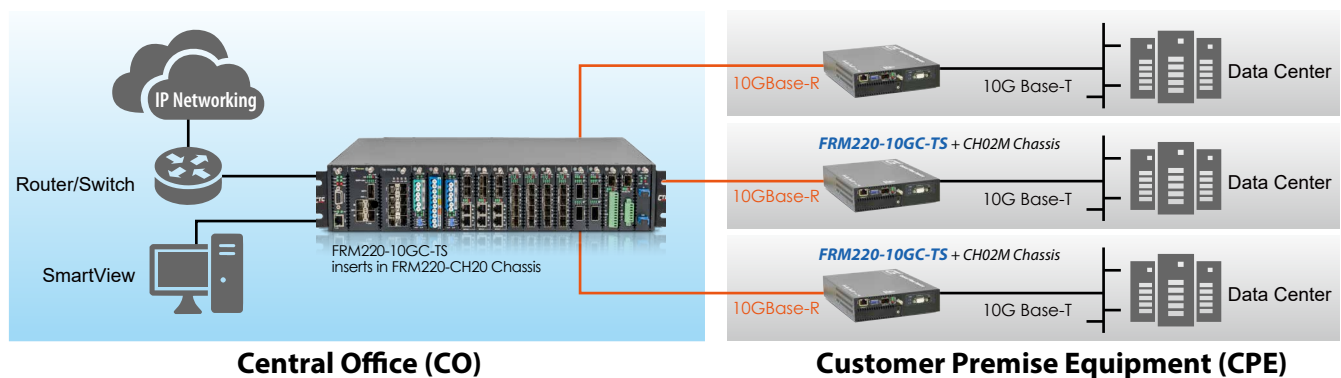

Ordering Information

Model Name	Description
FRM220-10GC-TS	10G Base-T RJ45 to 10G Base-R SFP+ media converter card, with DIP switch (optional SFP+)

Chassis Option

Model Name	Description
FRM220-CH20(HS)	2U 19", 20 slots rack mount chassis with high speed cooling fan and rack mounting kit
FRM220-CH20-AC	Chassis Power module 100~240 VAC, IEC connector, 200W
FRM220-CH20-DC48	Chassis Power module 36~72 VDC, 3 pin terminal block, 200W
FRM220-CH02M-AC/DC/AD	2-slot chassis with console port and AC or DC power, with fan
FRM220-CH02/NMC-AC/DC/AD	2-slot chassis with fan, managed via optional NMC card and with AC, DC or AD power
FRM220-CH02/SMT-AC/DC/AD	2-slot chassis with fan, managed via optional NMC card and with AC, DC or AD power plus fan/power alarm detection